

**P802.11g**  
**Draft Supplement to Standard [for] Information Technology—**  
**Telecommunications and information exchange between systems—**  
**Local and metropolitan area networks—Specific requirements—**  
**Part 11: Wireless LAN Medium Access Control (MAC) and Physical**  
**Layer (PHY) specifications:**

**Further Higher Data Rate Extension in the 2.4 GHz band**

Prepared by the LAN/MAN Standards Committee of the  
IEEE Computer Society

Copyright © 2003 by the Institute of Electrical and Electronics Engineers, Inc.  
Three Park Avenue  
New York, New York 10016-5997, USA  
All rights reserved

This document is an unapproved draft of a proposed IEEE-SA Standard—USE AT YOUR OWN RISK. As such, this document is subject to change. Permission is hereby granted for IEEE Standards Committee participants to reproduce this document for purposes of IEEE standardization activities only. Prior to submitting this document to another standard development organization for standardization activities, permission must first be obtained from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department. Other entities seeking permission to reproduce portions of this document must obtain the appropriate license from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department. The IEEE is the sole entity that may authorize the use of IEEE owned trademarks, certification marks, or other designations that may indicate compliance with the materials contained herein.

IEEE Standards Activities Department  
Standards Licensing and Contracts  
445 Hoes Lane, P.O. Box 1331  
Piscataway, NJ 08855-1331, USA

Copyright © 2003 IEEE. All rights reserved.  
This is an unapproved IEEE Standards Draft, subject to change.

Document provided by IHS Licensee=Federal Aviation Admin/9999507100, User=, 10/02/2003 07:49:13 MDT Questions or comments about this message: please call the Document Policy Group at 1-800-451-1584.

**IEEE P802.11g/D8.2**  
**DRAFT Supplement to STANDARD [for]**  
**Information Technology**  
**-Telecommunications and information exchange**  
**between systems**  
**-Local and metropolitan area networks-Specific**  
**requirements**  
**- Part 11: Wireless LAN Medium Access Control**  
**(MAC) and Physical Layer (PHY) specifications:**  
**Further Higher Data Rate Extension in the 2.4**  
**GHz Band**

Sponsor  
**LAN/MAN Standards Committee of the IEEE Computer Society**

Copyright © 2003 by the Institute of Electrical and Electronics Engineers, Inc.  
Three Park Avenue  
New York, New York 10016-5997, USA  
All rights reserved.

All rights reserved. This document is an unapproved draft of a proposed IEEE Standard. As such, this document is subject to change. USE AT YOUR OWN RISK! Because this is an unapproved draft, this document must not be utilized for any conformance/compliance purposes. Permission is hereby granted for IEEE Standards Committee participants to reproduce this document for purposes of IEEE standardization activities only. Prior to submitting this document to another standards development organization for standardization activities, permission must first be obtained from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department. Other entities seeking permission to reproduce this document, in whole or in part, must obtain permission from the Manager, Standards Licensing and Contracts, IEEE Standards Activities Department.

IEEE Standards Activities Department  
Standards Licensing and Contracts  
445 Hoes Lane, P.O. Box 1331  
Piscataway, NJ 08855-1331, USA

**Abstract:** Changes and additions to IEEE Std 802.11, 1999 (Reaff 2003) are provided to support the further higher data rate extension for operation in the 2.4 GHz band.

**Keywords:** LAN, Local Area Network, Wireless, Radio Frequency

## Introduction

(This Introduction is not part of P802.11g/D8.0, Draft Supplement to IEEE Standard for Information Technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications—Further Higher-Speed Physical Layer Extension in the 2.4 GHz Band.). This standard is part of a family of standards for Local Area Networks (LANs). This supplement covers an extension to IEEE STD 802.11 and all amendments existing as of Jan. 2003 to increase the data rates in the 2.4 GHz band to greater than 20 Mbit/s.

## Participants

At the time the draft of this amendment was sent to sponsor ballot, the IEEE 802.11 working group officers where:

**Stuart J. Kerry**, *Chair* **Al Petrick** and **Harry Worstell**, *Vice-Chairs*  
**Tim Godfrey**, *Secretary*  
**Brian Mathews**, *Publicity Standing Committee*  
**Tan Teik-Kheong**, *Wireless Next Generation Standing Committee*

**John Fakatselis**, *Chair Task Group e* **Duncan Kitchen**, *Vice-Chair Task Group e*  
**Dave Bagby**, *Chair Task Group f*  
**Mika Kasslin**, *Chair Task Group h*  
**David Halasz**, *Chair Task Group i*

At the time the draft of this amendment was sent to sponsor ballot, the Task Group G officers where:

**Matthew B. Shoemake**, *Chair*, **John Terry**, *Vice-Chair*  
**Carl F. Andren**, *Technical Editor*, **Kevin Smart**, *Secretary*

At the time the draft of this standard was sent to sponsor ballot, the IEEE 802.11 working group members where:

37 Tomoko Adachi	60 Tomer Bentzion	83 Craig Conkling
38 Areg Alimian	61 Mathilde Benveniste	84 Todor Cooklev
39 Richard Allen	62 Simon Black	85 Thomas P Costas
40 Keith Amann	63 Jan Boer	86 Wm. Caldwell Crosswy
41 Merwyn Andrade	64 Jim Brennan	87 Peter Dahl
42 Carl F. Andren	65 Ronald Brockmann	88 Barry Davis
43 Butch Anton	66 Alistair G. Buttar	89 Rolf De Vegt
44 Mitch Aramaki	67 Nancy Cam-Winget	90 Javier del Prado
45 Takashi Aramaki	68 Bill Carney	91 Michael Derby
46 Larry Arnett	69 Pat Carson	92 Georg Dickmann
47 Geert A. Awater	70 Clint Chaplin	93 Wim Diepstraten
48 Floyd Backes	71 Hung-Kun Chen	94 Roger Durand
49 David Bagby	72 Yi-Ming Chen	95 Eryk Dutkiewicz
50 Jay Bain	73 Greg Chesson	96 Mary DuVal
51 Dennis J. Baker	74 Alan Chickinsky	97 Donald E. Eastlake III
52 Bala Balachander	75 Aik Chindapol	98 Dennis Eaton
53 Raja Banerjea	76 Leigh M. Chinitz	99 Peter Ecclesine
54 Boyd Bangerter	77 Bong-Rak Choi	100 Jon Edney
55 Simon Barber	78 Sunghyun Choi	101 Christoph Euscher
56 Gil Bar-Noy	79 Ken Clements	102 John Fakatselis
57 John Barr	80 John T. Coffey	103 Lars Falk
58 Kevin M. Barry	81 Terry Cole	104 Augustin J. Farrugia
59 Anuj Batra	82 Paul Congdon	105 Weishi Feng

1	Norm Finn	60	Mika Kasslin	119	Mehul Mehta
2	Matthew James Fischer	61	Patrick Kelly	120	Pratik Mehta
3	Kenji Fujisawa	62	Stuart J. Kerry	121	Robert C. Meier
4	Marcus Gahler	63	Andrew K. Khieu	122	Graham Melville
5	James Gardner	64	Jamshid Kun-Jush	123	Klaus Meyer
6	Atul Garg	65	Ryoji Kido	124	Robert Miller
7	Al Garrett	66	Dukhyun Kim	125	Partho Mishra
8	Vafa Ghazi	67	Edward Kim	126	Yasuhiko Mizoguchi
9	Tim Godfrey	68	Je Woo Kim	127	Leo Monteban
10	Wataru Gohda	69	Joonsuk Kim	128	Michael Montemurro
11	Peter Goidas	70	Ziv Kimhi	129	Tim Moore
12	Alex Gorokhov	71	Duncan Kitchin	130	Mike Moreton
13	Rik Graulus	72	Günter Kleindl	131	Roy Morris
14	Evan Green	73	Cees Klik	132	Robert Moskowitz
15	Larry Green	74	David Kline	133	Oliver Muelhens
16	Patrick Green	75	John M. Kowalski	134	Peter Murphy
17	Kerry Greer	76	Bruce P. Kraemer	135	Peter Murray
18	Daqing Gu	77	Thomas Kuehnelt	136	Andrew Myles
19	Srikanth Gummadi	78	Denis Kuwahara	137	Ravi Narasimhan
20	Fred Haisch	79	Joe Kwak	138	Kevin Negus
21	David Halasz	80	Paul A. Lambert	139	David B. Nelson
22	Steve D. Halford	81	David S. Landeta	140	Dan Nemits
23	Mark Hamilton	82	Jim Lansford	141	Chiu Ngo
24	Christopher J. Hansen	83	Colin Lanzl	142	Qiang Ni
25	Yasuo Harada	84	Kim Laraqui	143	Gunnar Nitsche
26	Amer A. Hassan	85	Jon LaRosa	144	Erwin R. Noble
27	Kevin Hayes	86	David J. Leach, Jr.	145	Hiroshi Nomura
28	Victor Hayes	87	Dongjun Lee	146	Tzvetan D. Novkov
29	Chris Heegard	88	Richard van Leeuwen	147	Ivan Oakes
30	Robert Heile	89	Martin Lefkowitz	148	Bob O'Hara
31	Garth Hillman	90	Uriel Lemberger	149	Yoshihiro Ohtani
32	Christopher Hinsz	91	Onno Letanche	150	Kazuhiro Okanoue
33	Jun Hirano	92	Mike Lewis	151	Lior Ophir
34	Mikael Hjelm	93	Sheung Li	152	Richard H. Paine
35	Jin-Meng Ho	94	Jie Liang	153	Mike Paljug
36	Maarten Hoebe	95	Isaac Lim Wei Lih	154	Vijay M. Patel
37	Michael Hoghooghi	96	Huashih A. Lin	155	Lizy Paul
38	Allen Hollister	97	Shawn Liu	156	Sebastien Perrot
39	Srinath Hosur	98	Titus Lo	157	Al Petrick
40	Russell Housley	99	Peter Loc	158	James Portaro
41	Frank P Howley, Jr	100	Ralph Lombardo, Jr.	159	Al Potter
42	Dave Hudak	101	Luke Ludeman	160	Mike Press
43	John Hughes	102	Yeong-Chang Maa	161	Ron Provencio
44	David Hunter	103	Akira Maeki	162	Henry Ptasinski
45	David Hytha	104	Douglas Makishima	163	Raad Raad
46	Hiroshi Ide	105	Mahalingam Mani	164	Ali Raissinia
47	Daichi Imamura	106	Roger Marks	165	Murali Ramadoss
48	Yasuhiko Inoue	107	Brian Mathews	166	Noman Rangwala
49	Katsumi Ishii	108	Jo-Ellen F Mathews	167	Ivan Reede
50	Eric Jacobsen	109	Mark Mathews	168	Stanley A. Reible
51	Marc Jalfon	110	Thomas Maufer	169	Danny Rettig
52	Peter Johansson	111	Conrad Maxwell	170	Edward Reuss
53	David Johnston	112	Justin McCann	171	Bill Rhyne
54	VK Jones	113	Kelly McClellan	172	Jim Richards
55	Bobby Jose	114	Gary McCoy	173	David Richkas
56	Daryl Kaiser	115	Bill McFarland	174	Maximilian Riegel
57	Srinivas Kandala	116	Gary McGarr	175	Carlos A. Rios
58	Jeyhan Karaoguz	117	Bill McIntosh	176	Benno Ritter
59	Kevin Karcz	118	Jorge Medina	177	Kent G. Rollins

1	Stefan Rommer	30	Paul F Struhsaker	59	Tim Wakeley
2	Jon Rosdahl	31	Michael Su	60	Jesse R. Walker
3	Pejman Roshan	32	Masahiro Takagi	61	Brad Wallace
4	Reinhard Ruckriem	33	Minoru Takemoto	62	Thierry Walrant
5	Ali Sadri	34	Pek-Yew Tan	63	Christopher Ware
6	Kenichi Sakusabe	35	Teik-Kheong Tan	64	Fujio Watanabe
7	Antonio E. Salloum Salazar	36	Takuma Tanimoto	65	Mark Webster
8	John H. Santhoff	37	Roger Teague	66	Menzo Wentink
9	Anil K. Sanwalka	38	Carl Temme	67	Robert Whelan
10	Sid Schrum	39	John Terry	68	Michael Wilhoyte
11	Erik Schylander	40	Yossi Texerman	69	Richard G.C. Williams
12	Michael Seals	41	Jerry A. Thrasher	70	Steven D. Williams
13	Joe Sensendorf	42	James D. Tomcik	71	Timothy G. Wong
14	Yangmin Shen	43	Walt Trzaskus	72	Harry Worstell
15	Matthew Sherman	44	Allen Tsai	73	Charles R. Wright
16	Matthew B. Shoemake	45	Chih C. Tsien	74	Micheal Wright
17	William Shvodian	46	Tom Tsoulogiannis	75	Liwen Wu
18	David Skellern	47	Toru Ueda	76	Yang Xiao
19	Donald I. Sloan	48	Naoki Urano	77	Shugong Xu
20	Kevin Smart	49	Niels Van Erven	78	Jung Yee
21	Andrew Smith	50	Wim J. van Houtum	79	Kit Yong
22	Dave Smith	51	Richard van Nee	80	Albert Young
23	Yoram Solomon	52	Patrick Vandenameele	81	Heejung Yu
24	Wei-Jei Song	53	Dmitri Varsanofiev	82	Patrick Yu
25	Amjad Soomro	54	Jagannatha L. Venkatesha	83	Glen Zorn
26	Gary Spiess	55	Madan Venugopal	84	Arnoud Zwemmer
27	Dorothy V. Stanley	56	Nanci Vogtli	85	Jim Zyren
28	Adrian Stephens	57	Dennis Volpano		
29	Carl R. Stevenson	58	Toan X. Vu		

86

87 *Voting Members:*

88 The following individuals were on the sponsor balloting committee:

89

90	Butch Anton	116	Andrew Germano	142	Leo Monteban
91	Eladio Arvelo	117	James Gilb	143	Mike Moreton
92	David Bagby	118	Tim Godfrey	144	Andrew Myles
93	Morris Balamut	119	Rajugopal Gubbi	145	Anthony Naples
94	John Barnett	120	Qiang Guo	146	Charles Ngethe
95	John Barr	121	Vic Hayes	147	Paul Nikolich
96	Bruce Barrow	122	Robert Heile	148	Erwin Noble
97	Jan Boer	123	Gerald Heller	149	Ellis Nolley
98	Mitchell Buchman	124	Niket Jindal	150	Timothy O'farrell
99	Naftali Chayat	125	Srinivas Kandala	151	Bob O'hara
100	Kimara Chin	126	Justin Kapp	152	Yoshihiro Ohtani
101	Keith Chow	127	Stuart Kerry	153	Satoshi Oyama
102	Terry Cole	128	Thomas A. Kim	154	Sebastien Perrot
103	Michael Coletta	129	Yongsuk Kim	155	Ian Perryman
104	Todor Cooklev	130	Cees Klik	156	Albert A. Petrick
105	Todd Cooper	131	Don Kopanoff	157	Subbu Ponnuswamy
106	Luis Cordova	132	John Kowalski	158	Hugo Pues
107	Dr. Guru Dutt Dhingra	133	Pi-Cheng Law	159	Vikram Punj
108	Thomas Dineen	134	Amir Leshem	160	Charles Rice
109	Dr. Sourav Dutta	135	Daniel Levesque	161	Maximilian Riegel
110	Peter Ecclesine	136	Sheung Li	162	Jon Rosdahl
111	Darrell Fletcher	137	Jeb Linton	163	Thomas Ruf
112	Keng Fong	138	Kyle Maus	164	Douglas Sanderson
113	Avraham Freedman	139	Michael Mcinnis	165	Durga Prasad Satapathy
114	Richard Fulsom	140	George Miao	166	Michael Seals
115	Michele Gammel	141	Apurva Mody	167	Stephen Shellhammer

1 Matthew Sherman  
2 Neil Shipp  
3 Gil Shultz  
4 Kevin Smart  
5 Amjad Soomro  
6 Dorothy V Stanley  
7 Clay Stocklin

8 Minoru Takemoto  
9 Jun Tan  
10 Shawn Taylor  
11 Jerry Thrasher  
12 Michelle Turner  
13 Dmitri Varsanofiev  
14 William Watté

15 Hung-Yu Wei  
16 Edward Woodrow  
17 Harry Worstell  
18 Jung Yee  
19 Oren Yuen  
20 Arnoud Zwemmer  
21

22

# Table of Contents

Participants .....	2
3 Definitions .....	9
3.41 Protection mechanism: .....	9
3.42 Protection mechanism frame .....	9
4 Abbreviations and acronyms .....	9
7 Frame Formats .....	10
7.2 Format of individual frame types .....	10
7.2.1.2 Clear to Send (CTS) frame format .....	10
7.2.3 Management frames .....	10
7.2.3.1 Beacon frame format .....	10
7.2.3.4 Association Request frame format .....	10
7.2.3.6 Reassociation Request frame format .....	11
7.2.3.7 Reassociation Response frame format .....	11
7.2.3.8 Probe Request frame format .....	11
7.2.3.9 Probe Response frame format .....	11
7.3 Management frame body components .....	11
7.3.1 Fixed fields .....	11
7.3.1.4 Capability Information field .....	11
7.3.1.9 Status code field .....	13
7.3.2 Information elements .....	13
7.3.2.2 Supported Rates element .....	13
7.3.2.13 ERP Information element .....	14
7.3.2.14 Extended Supported Rates element .....	15
9 MAC sublayer functional description .....	16
9.2 DCF .....	16
9.2.11 NAV distribution .....	16
9.2.12 Determination of PLME aCWmin characteristics .....	16
9.6 Multirate support .....	16
9.7 Frame exchange sequences .....	17
9.10 Protection mechanism .....	17
10 Layer management .....	18
10.4 PLME SAP interface .....	18
10.4.4 PLME-DSSSTESTMODE.request .....	18
18 High rate direct sequence spread spectrum (HR/DSSS) PHY specification .....	19
18.2 High Rate PLCP sublayer .....	19
18.2.2 PPDU Format .....	19
18.2.2.2 Short PPDU format .....	19
19 Extended rate PHY specification .....	20
19.1 Overview .....	20
19.1.1 Introduction .....	20
19.1.2 Operational modes .....	20
19.1.3 Scope .....	21
19.1.4 Extended rate PHY functions .....	21
19.2 PHY specific service parameter list .....	21
19.3 Extended rate PLCP sublayer .....	23
19.3.1 Introduction .....	23
19.3.2 PPDU format .....	23
19.3.2.1 Long preamble PPDU format .....	24
19.3.2.2 Short preamble PPDU format .....	25
19.3.2.3 ERP-OFDM PPDU format .....	25
19.3.2.4 DSSS-OFDM long preamble PPDU format .....	26
19.3.2.5 Short DSSS-OFDM PLCP PPDU format .....	27
19.3.3 PLCP data modulation and rate change .....	28
19.3.3.1 Long and short preamble formats .....	28
19.3.3.2 ERP-PBCC 22 Mbit/s and 33 Mbit/s formats .....	28

1	19.3.3.3 ERP-OFDM format .....	30
2	19.3.3.4 Long & short DSSS-OFDM PLCP format .....	31
3	19.3.4 PLCP transmit procedure .....	32
4	19.3.5 CCA .....	32
5	19.3.6 PLCP receive procedure .....	32
6	19.4 ERP PMD operating specifications (general) .....	33
7	19.4.1 Regulatory requirements .....	33
8	19.4.2 Operating channel frequencies .....	33
9	19.4.3 Transmit and receive in-band and out-of-band spurious emissions.....	33
10	19.4.4 Slot time .....	33
11	19.4.5 SIFS value .....	33
12	19.4.6 CCA performance .....	33
13	19.4.7 PMD transmit specifications.....	34
14	19.4.7.1 Transmit power levels .....	34
15	19.4.7.2 Transmit center frequency tolerance .....	34
16	19.4.7.3 Symbol clock frequency tolerance.....	34
17	19.5 ERP operation specifications.....	34
18	19.5.1 Receiver minimum input level sensitivity.....	34
19	19.5.2 Adjacent channel rejection.....	34
20	19.5.3 Receive maximum input level capability .....	35
21	19.5.4 Transmit spectral mask.....	35
22	19.6 ERP-PBCC operation specifications.....	35
23	19.6.1 Receiver minimum input level sensitivity.....	35
24	19.6.2 Receiver adjacent channel rejection .....	35
25	19.7 DSSS-OFDM operation specifications.....	35
26	19.7.1 Overview .....	35
27	19.7.2 Single-carrier to multi-carrier transition requirements.....	36
28	19.7.2.1 Spectral binding requirement.....	37
29	19.7.2.2 Sample-power matching requirement.....	42
30	19.7.2.3 Transition time alignment.....	42
31	19.7.2.4 Single-carrier termination.....	44
32	19.7.2.5 Transition carrier frequency requirement .....	44
33	19.7.2.6 Transition carrier phase requirement.....	45
34	19.7.2.7 Transmit modulation accuracy requirement .....	46
35	19.8 ERP PLME.....	47
36	19.8.1 PLME SAP .....	47
37	19.8.2 MIB .....	48
38	19.8.3 TXTIME.....	48
39	19.8.3.1 ERP-OFDM TXTIME calculations .....	48
40	19.8.3.2 ERP-PBCC TXTIME calculations.....	49
41	19.8.3.3 DSSS-OFDM TXTIME calculations.....	49
42	19.8.4 ERP-OFDM PLCP PSDU definition .....	50
43	19.9 Extended rate PMD sublayer.....	51
44	19.9.1 Scope and field of application .....	51
45	19.9.2 Overview of service .....	51
46	19.9.3 Overview of Interactions.....	51
47	19.9.4 Basic service and options.....	51
48	19.9.4.1 PMD_SAP peer-to-peer service primitives .....	51
49	19.9.4.2 PMD_SAP sublayer-to-sublayer service primitives .....	51
50	19.9.4.3 PMD_SAP service primitive parameters .....	51
51	19.9.5 PMD_SAP detailed service specification.....	53
52	19.9.5.1 PMD_DATA.request.....	54
53	19.9.5.2 PMD_DATA.indicate .....	54
54	19.9.5.3 PMD_MODULATION.request.....	54
55	19.9.5.5 PMD_PREAMBLE.request.....	54
56	19.9.5.7 PMD_TXSTART.request.....	54
57	19.9.5.8 PMD_TXEND.request.....	54
58	19.9.5.9 PMD_ANTSEL.request.....	54
59	19.9.5.11 PMD_TXPRWLVL.request.....	54

1	19.9.5.12 PMD_RATE.request.....	54
2	19.9.5.14 PMD_RSSI.indicate .....	54
3	19.9.5.15 PMD_SQ.indicate .....	54
4	19.9.5.16 PMD_CS.indicate .....	54
5	19.9.5.17 PMD_ED.indicate.....	55
6	Annex A Protocol implementation conformance statement (PICS) Proforma (normative) .....	56
7	A.3 Instructions for completing the PICS proforma .....	56
8	A.3.1.....	56
9	A.4 PIC Proforma .....	56
10	A.4.3 - IUT Configuration .....	56
11	A.4.4 MAC protocol.....	56
12	A.4.4.1 Mac Protocol capabilities .....	56
13	A 4.12 – ERP Physical Layer functions.....	57
14	Annex C Formal Description of MAC operation (normative).....	60
15	Annex D ASN.1 coding of MAC and PHY MIB (normative).....	66
16		
17		

# IEEE P802.11g/D8.2

## DRAFT Supplement to STANDARD [for] Information Technology

### -Telecommunications and information exchange between systems

### -Local and metropolitan area networks-Specific Requirements

### -Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications:

## Further higher data rate extension in the 2.4 GHz band

[This supplement is based on the current edition of IEEE Std 802.11-1999 (Reaff 2003).]

EDITORIAL NOTE—The editing instructions contained in this supplement define how to merge the material contained herein into the existing base standard to form the new comprehensive standard.

The editing instructions are shown in ***bold italic***. Three editing instructions are used: change, delete, and insert.

***Change*** is used to make small corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using strikethrough (to remove old material) or underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instructions. Editorial notes will not be carried over into future editions.

## 3 Definitions

*Insert additional definitions after 3.40 and renumber appropriately as follows:*

### 3.41 Protection mechanism:

Any procedure that attempts to update the NAV of all receiving STAs prior to the transmission of a frame that may or may not be understood by receivers.

### 3.42 Protection mechanism frame

A protection mechanism frame is any frame that is sent as part of a protection mechanism procedure.

## 4 Abbreviations and acronyms

*Insert the following abbreviations alphabetically in the list in 4:*

<b>DSSS-OFDM</b>	PHYs using DSSS-OFDM modulation under 19.7 rules
<b>ERP</b>	extended rate PHYs conforming to clause 19
<b>ERP-PBCC</b>	PHYs using extended rate PBCC modulation under 19.6 rules
<b>ERP-CCK</b>	PHYs using CCK modulation under clause 19 rules
<b>ERP-DSSS</b>	PHYs using DSSS modulation under clause 19 rules
<b>ERP-DSSS/CCK</b>	PHYs using DSSS or CCK modulation under clause 19 rules
<b>ERP-OFDM</b>	PHYs using OFDM modulation under 19.5 rules
<b>EVM</b>	Error Vector Magnitude

**NonERP** non-extended rate -PHYs conforming to clauses 15 or 18 but not 19

## 7 Frame Formats

### 7.2 Format of individual frame types

#### 7.2.1.2 Clear to Send (CTS) frame format

*Insert the following text at the end of section 7.2.1.2*

If the CTS is the first frame in the exchange and the pending data or management frame requires acknowledgement, the duration value is the time, in microseconds, required to transmit the pending data or management frame, plus one SIFS interval, plus one ACK frame, and an additional SIFS interval. If the CTS is the first frame in the exchange and the pending data or management frame does not require acknowledgement, the duration value is the time, in microseconds, required to transmit the pending data or management frame, plus one SIFS interval. If the calculated duration includes a fractional microsecond, that value is rounded up to the next higher integer.

#### 7.2.3 Management frames

*Insert a sentence after the last paragraph:*

Gaps may exist in the ordering of fixed fields and elements within frames. The order that remains shall be ascending.

##### 7.2.3.1 Beacon frame format

*Insert two rows to Table 5, change note on row 7*

Order	Information	Notes
7	DS Parameter Set	The DS Parameter Set information element is present within Beacon frames generated by STAs using <del>direct sequence</del> clause 15, 18, and 19 PHYs.
<u>19</u>	<u>ERP Information</u>	<u>The ERP Information Element is present within Beacon frames generated by STAs using ERP PHYs and is optionally present in other cases.</u>
<u>20</u>	<u>Extended Supported Rates Element</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise</u>

##### 7.2.3.4 Association Request frame format

*Insert a line to Table 7 Association Request frame body as line 5 as shown*

Order	Information	Notes
<u>5</u>	<u>Extended supported rates</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

##### 7.2.3.5 Association Response frame format

*Insert a line to Table 8 Association Response frame body as line 5 as shown*

Order	Information	Notes
<u>5</u>	<u>Extended supported rates</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

### 7.2.3.6 Reassociation Request frame format

*Insert a line to Table 9 Reassociation Request frame body as line 6 as shown*

Order	Information	Notes
<u>6</u>	<u>Extended supported rates</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

### 7.2.3.7 Reassociation Response frame format

*Insert a line to Table 10 Reassociation Response frame body as line 5 as shown*

Order	Information	Notes
<u>5</u>	<u>Extended supported rates</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

### 7.2.3.8 Probe Request frame format

*Insert a line to Table 11 Probe Request frame body as line 4 as shown*

Order	Information	Notes
<u>4</u>	<u>Extended supported rates</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

### 7.2.3.9 Probe Response frame format

*Insert two rows to Table 12 and change text in row 7*

Order	Information	Notes
<u>7</u>	<u>DS Parameter Set</u>	The DS Parameter Set information element is present within Beacon frames generated by STAs using <del>direct sequence</del> <u>clause 15, 18, and 19</u> PHYs.
<u>18</u>	<u>ERP Information</u>	<u>ERP Information Element is present within Probe Response frames generated by STAs using ERP PHYs and is optionally present in other cases.</u>
<u>19</u>	<u>Extended Supported Rates Element</u>	<u>The Extended Supported Rates element is present whenever there are more than 8 supported rates, and is optional otherwise.</u>

## 7.3 Management frame body components

### 7.3.1 Fixed fields

#### 7.3.1.4 Capability Information field


*Change several paragraphs and insert 5 more in 7.3.1.4 as follows. Existing paragraphs not shown are unchanged and are to be retained.*

The Capability Information field contains a number of subfields that are used to indicate requested or advertised optional capabilities.

The length of the Capability Information field is 2 octets. The Capability Information field consists of the following subfields: ESS, IBSS, CF-Pollable, CF-Poll Request, Privacy, Short Preamble, Packet Binary Convolutional Code (PBCC), ~~and~~ Channel Agility, Short Slot Time, and DSSS-OFDM. The format of the Capability Information field is

illustrated in Figure 27. No subfield is supplied for ERP as a STA supports ERP operation if it includes all the clause 19 mandatory rates in its supported rate set.

***Insert two fields (b10 and b13) in Figure 27 as shown:***

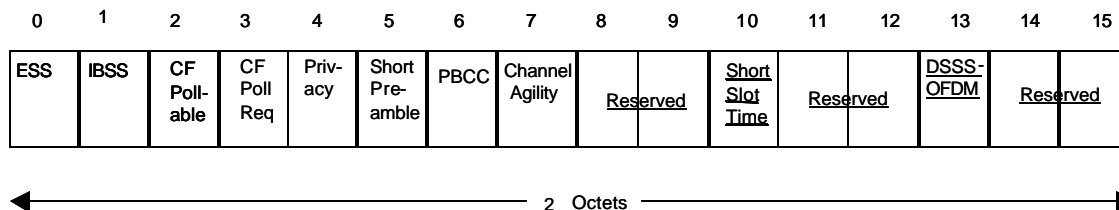

### Figure 27 Capability information Field

APs as well as STAs in IBSSs shall set the Short Preamble subfield to 1 in transmitted Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs to indicate that the use of the Short Preamble ~~option~~, as described in 18.2.2.2, is allowed within this BSS. To indicate that the use of the Short Preamble ~~option~~ is not allowed, the Short Preamble subfield shall be set to 0 in Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs transmitted within the BSS.

ERP STAs shall set the MIB variable dot11ShortPreambleOptionImplemented to true as all ERP STAs support both long and short preamble formats.

APs (as well as STAs in IBSSs) shall use the PBCC subfield in transmitted Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs to indicate that the ~~use of the~~ PBCC Modulation option, as described in 18.4.6.6 and 19.6, is allowed within the BSS. To indicate that PBCC Modulation option is not allowed, the PBCC subfield shall be set to 0 in Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs transmitted within the BSS.

Bit 7 of the Capability Information field shall be used to indicate Channel Agility capability by the High Rate direct sequence spread spectrum (HR/DSSS) or ERP PHYs. STAs shall set the Channel Agility bit to 1 when Channel Agility is in use, and shall set it to 0 otherwise.

STAs shall set the Short Slot Time subfield to 1 in transmitted Association Request and Reassociation Request MMPDUs when the MIB attribute dot11ShortSlotTimeOptionImplemented and dot11ShortSlotTimeOptionEnabled are true. Otherwise, the STA shall set the Short Slot Time subfield to 0 in transmitted Association Request and Reassociation Request MMPDUs.

If a STA that does not support Short Slot Time associates, the AP shall use long slot time beginning at the first Beacon subsequent to the association of the long slot time STA. APs shall set the Short Slot Time subfield in transmitted Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs to indicate the currently used slot time value within this BSS.

STA's shall set the MAC variable aSlotTime to the short slot value upon transmission or reception of Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs from the BSS that the STA has joined or started and that have the short slot subfield set to 1 when the MIB attribute dot11ShortSlotTimeOptionImplemented is true. STA's shall set the MAC variable aSlotTime to the long slot value upon transmission or reception of Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs from the BSS that the STA has joined or started and that have the short slot subfield set to 0 when the MIB attribute dot11ShortSlotTimeOptionImplemented is true. STA's shall set the MAC variable aSlotTime to the long slot value at all times when the MIB attribute dot11ShortSlotTimeOptionImplemented is false. When the dot11ShortSlotTimeOptionImplemented MIB attribute is not present, or when the PHY supports only a single slot time value, then the STA shall set the MAC variable aSlotTime to the slot value appropriate for the attached PHY.

For IBSS, the Short Slot Time subfield shall be set to 0.

APs as well as STAs in IBSSs shall set the DSSS-OFDM subfield to 1 in transmitted Beacon, Probe Response, Association Response, and Reassociation Response management MMPDUs to indicate that the use of DSSS-OFDM, as described in 19.7, is allowed within this BSS or by STAs that want to use DSSS-OFDM within an IBSS. To indicate that the use of DSSS-OFDM is not allowed, the DSSS-OFDM subfield shall be set to 0 in Beacon, Probe Response, Association Response, and Reassociation Response MMPDUs transmitted within the BSS.

STAs shall set the DSSS-OFDM subfield to 1 in transmitted Association Request and Reassociation Request MMPDUs when the MIB attribute dot11DSSS-OFDMOptionImplemented and dot11DSSS-OFDMOptionEnabled are true. Otherwise, STAs shall set the DSSS-OFDM subfield to 0 in transmitted Association Request and Reassociation Request MMPDUs.

Unused bits 8–15 of the Capability Information field are reserved.

### 7.3.1.9 Status code field

Insert two Status Codes to Table 19, number appropriately, and change reserved codes appropriately:

Table 19—Status Codes

Status Code	Meaning
25	Association denied due to requesting station not supporting the Short Slot Time option
26	Association denied due to requesting station not supporting the DSSS-OFDM option.

### 7.3.2 Information elements

Insert two new information elements to Table 20 and change the “Reserved IDs” appropriately.

Information Element	Element ID
ERP Information	42
Extended Supported Rates	50

#### 7.3.2.2 Supported Rates element

Change the first two paragraphs of 7.3.2.2 as follows:

The Supported Rates element specifies the values up to eight rates in the Operational-Rate-Set parameter, as described in the MLME\_Join.request and MLME\_Start.request primitives. The information field is encoded as 1 to 8 octets, where each octet describes a single Supported Rate. If the number of rates in the Operational Rate Set exceeds eight, then an Extended Supported Rate element shall be generated to specify the remaining supported rates. The use of the Extended Supported Rates element is optional otherwise.

Within Beacon, Probe Response, Association Response, and Reassociation Response management frames, each Supported Rate belonging to the BSS basic rate set is encoded as an octet with the MSB (bit 7) set to 1 and bits 6 through 0 are set to the appropriate value from the valid range column of the DATA RATE row of the table in 10.4.4.2 (e.g., a 1 Mbit/s rate belonging to the BSS basic rate set is encoded as X'82'). Rates not belonging to the BSS basic rate set are encoded with the MSB set to 0 and bits 6 through 0 are set to the appropriate value from the valid range column of the DATA RATE row of the table in 10.4.4.2 (e.g., a 2 Mbit/s rate not belonging to the BSS basic rate set is encoded as X'04'). The MSB of each Supported Rate octet in other management frame types is ignored by receiving STAs.

Insert the following text after the figure:

If the DSSS-OFDM bit is set to 1 in the transmitted Capability Information field of an MMPDU, then any supported rates transmitted in that frame that include rates that are common to both DSSS-OFDM and ERP-OFDM, shall be interpreted by receiving and transmitting STA to indicate support for both DSSS-OFDM and ERP-OFDM at the

indicated rate. However, if any of those rates are indicated as basic (a rate in the BSSBasicRateSet), then the basic rate designation shall be interpreted by receiving and transmitting STA to apply only for the ERP-OFDM modulation and rate. If the PBCC bit is set to 1 in the transmitted capability field of an MMPDU, then any supported rates transmitted in that frame that include rates that are common to both PBCC and CCK, shall be interpreted by receiving and transmitting STA to indicate support for both PBCC and CCK at the indicated rate. However, if any of those rates are indicated as basic, then the basic rate designation shall be interpreted by receiving and transmitting STA to apply only for the CCK modulation and rate. That is, if the rate is indicated as basic, the basic designation does not apply to DSSS-OFDM, PBCC, or ERP-PBCC.

*Insert a new sub clause to 7.3.2 containing the following text:*

### 7.3.2.13 ERP Information element

The ERP Information element contains information on the presence of clause 15 or clause 18 stations in the BSS that are not capable of clause 19 (ERP-OFDM) data rates. It also contains the requirement of the ERP Information element sender (AP in a BSS or STA in an IBSS) as to the use of protection mechanisms to optimize BSS performance and as to the use of long or short Barker preambles. See Figure 7.3.2.13 for a definition of the frame element.

If one or more NonERP STAs are associated in the BSS, the Use\_Protection bit shall be set to 1 in transmitted ERP Information Elements.

In an IBSS, the setting of the Use\_Protection bit is left to the STA. In an IBSS, there is no uniform concept of association; therefore a typical algorithm for setting the Use\_Protection bit will take into account the traffic pattern and history on the network. If a member of an IBSS detects one or more NonERP STAs which are members of the same IBSS, then the Use\_Protection bit should be set to 1 in the ERP Information Element of transmitted Beacon and Probe Response frames.

The NonERP\_Present bit shall be set to 1 when a NonERP STA is associated with the BSS. Examples of when the NonERP present bit may additionally be set to 1 include, but are not limited to: when a) a NonERP infrastructure or independent BSS is overlapping (A NonERP BSS may be detected by the reception of a Beacon where the supported rate contains only clause 15 or clause 18 rates). b) In an IBSS, if a Beacon frame is received from one of the IBSS participants where the supported rate set contains only clause 15 or clause 18 rates. c) A management frame (excluding a Probe Request) is received where the supported rate set includes only clause 15 or clause 18 rates.

ERP APs and ERP STAs shall invoke the use of protection mechanism following transmission or reception of the Use\_Protection bit with a value of 1 in an MMPDU to or from the BSS that the ERP AP or ERP STA has joined or started. ERP APs and ERP STAs may additionally invoke protection mechanism use at other times. ERP APs and ERP STAs may disable protection mechanism use following transmission or reception of the Use\_Protection bit with a value of 0 in an MMPDU to or from the BSS that the ERP AP or ERP STA has joined or started.

When there are no NonERP STAs associated with the BSS and the ERP Information Element sender's dot11ShortPreambleOptionImplemented MIB variable is set to true, then the Barker\_Preamble\_Mode bit may be set to 0. The Barker\_Preamble\_Mode bit shall be set to 1 by the ERP Information Element sender if one or more associated NonERP STAs are not short preamble capable as indicated in their Capability Information field, or if the ERP Information Element sender's dot11ShortPreambleOptionImplemented MIB variable is set to false.

If a member of an IBSS detects one or more non short preamble capable STAs that are members of the same IBSS, then the Barker\_Preamble\_Mode bit should be set to 1 in the transmitted ERP Information Element.

ERP APs and ERP STAs shall use long preambles when transmitting clause 15, clause 18 and clause 19 frames following transmission or reception of an ERP Information Element with a Barker\_Preamble\_Mode value of 1 in an MMPDU to or from the BSS that the ERP AP or ERP STA has joined or started, regardless of the value of the shortpreamble capability bit from the same received or transmitted MMPDU that contained the ERP Information Element. ERP APs and ERP STAs may additionally use long preambles when transmitting clause 15, clause 18 and clause 19 frames at other times. ERP APs and ERP STAs may use short preambles when transmitting clause 15, clause 18 and clause 19 frames following transmission or reception of an ERP Information Element with a Barker\_Preamble\_Mode value of 0 in an MMPDU to or from the BSS that the ERP AP or ERP STA has joined or

started, regardless of the value of the shortpreamble capability bit from the same received or transmitted MMPDU. NonERP STAs and NonERP APs may also follow the rules given in this paragraph.

Recommended behavior for setting the Use\_Protection bit is contained in 9.10.

The ERP Information element shall have the form shown in Figure 7.3.2.13.


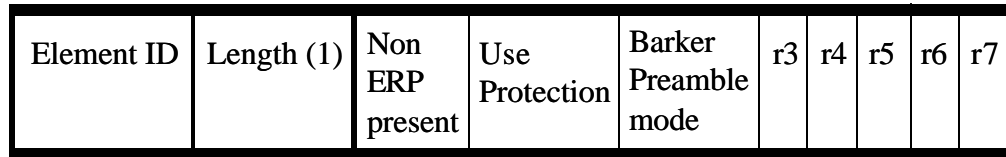


Figure 7.3.2.13 ERP Information element

Bits r3 through r7 are reserved, set to 0, and are ignored on reception. Note that the length of this element is flexible and may be expanded in the future.

*Insert a new sub clause at the end of 7.3.2 containing the following text:*

#### 7.3.2.14 Extended Supported Rates element

The Extended Supported Rates element specifies the rates in the OperationalRateSet as described in the MLME\_JOIN.request and MLME\_START.request primitives that are not carried in the Supported Rates element. The information field is encoded as 1 to 255 octets where each octet describes a single supported rate.

Within Beacon, Probe Response, Association Response, and Reassociation Response management frames, each supported rate belonging to the BSS basic rate set, as defined in 10.3.10.1, is encoded as an octet with the msb (bit 7) set to 1 and bits 6 through 0 are set to the appropriate value from the valid range column of the DATA\_RATE row of the table in 10.4.4.2 (e.g., a 1 Mbit/s rate belonging to the BSS basic rate set is encoded as X'82'). Rates not belonging to the BSS basic rate set are encoded with the msb set to 0 and bits 6 through 0 are set to the appropriate value from the valid range column of the DATA\_RATE row of the table in 10.4.4.2 (e.g., a 2 Mbit/s rate not belonging to the BSS basic rate set is encoded as X'04'). The msb of each octet in the Extended Supported rate element in other management frame types is ignored by receiving STAs.

BSS basic rate set information in Beacon and Probe Response management frames is used by STAs in order to avoid associating with a BSS if they do not support all the data rates in the BSS basic rate set.

For stations supporting 8 or fewer data rates, this element is optional for inclusion in all of the frame types that include the supported rates element. For stations supporting more than 8 data rates, this element shall be included in all of the frame types that include the supported rates element.




Figure 7.3.2.14—Extended Supported rates element format

## 9 MAC sublayer functional description

### 9.2 DCF

*Change the 2<sup>nd</sup> to last paragraph as shown:*

The medium access protocol allows for stations to support different sets of data rates. All STAs shall be able to receive and transmit at all the data rates in the aBasicRateSet specified parameter of the MLME\_Join.request and MLME\_Start.request primitives. To support the proper operation of the RTS/CTS and the virtual CS mechanism, all STAs shall be able to detect the RTS and CTS frames. ~~For this reason, the RTS and CTS frames shall be transmitted at one of the rates in the BSS basic rate set. (See 9.6 for a description of multirate operation.)~~

*Insert two new subclauses after 9.2.10*

#### 9.2.11 NAV distribution

When a node needs to distribute NAV information, for instance to reserve the medium for a transmission of a non-basic rate frame (that may not be heard by other nodes in the BSS), the node may first transmit a CTS frame with the RA field equal to its own MAC address (CTS-to-self) and with a duration value that protects the pending transmission, plus possibly an ACK frame.

The CTS-to-self NAV distribution mechanism is lower in network overhead cost than RTS/CTS NAV distribution mechanism, but CTS-to-self is less robust against hidden nodes and collisions than RTS/CTS. STAs employing a NAV distribution mechanism should choose a mechanism such as CTS-to-self or RTS/CTS that is appropriate for the given network conditions. If errors occur when employing the CTS-to-self mechanism, STAs should switch to a more robust mechanism.

#### 9.2.12 Determination of PLME aCWmin characteristics

In the case of the clause 19 Extended Rate PHY, the aCWmin value is dependent on the requestor's characteristic rate set. The characteristic rate set is equal to the IBSS's supported rate set when the STA is operating as a member of an IBSS. It is equal to the AP's supported rate set when the STA is associated with an AP. At all other times, it is equal to the STA's mandatory rate set. The MAC variable aCWmin is set to aCWmin(0) if the characteristic rate set includes only rates in the set 1,2,5,5,11 otherwise, aCWmin is set to aCWmin(1). If the returned value for aCWmin is a scalar, then the MAC always sets the variable aCWmin to the returned scalar value of aCWmin

## 9.6 Multirate support

*Change the text as shown:*

Some PHYs have multiple data transfer rate capabilities that allow implementations to perform dynamic rate switching with the objective of improving performance. The algorithm for performing rate switching is beyond the scope of this standard, but in order to ensure coexistence and interoperability on multirate-capable PHYs, this standard defines a set of rules ~~that shall~~ to be followed by all STAs.

~~All control frames shall be transmitted at one of the rates in the BSS basic rate set so that they will be understood.~~

All control frames that initiate a frame exchange shall be transmitted at one of the rates in the BSSBasicRateSet, unless the transmitting STAs protection mechanism is enabled, and the control frame is a protection mechanism frame, in which case, the control frame shall be transmitted at a rate according to the separate rules for determining the rates of transmission of protection frames in 9.10.

All frames with multicast or broadcast ~~receiver~~ in the addresses 1 field shall be transmitted at one of the rates included in the BSS basic rate set, regardless of their type or subtype.

Data and/or management MPDUs with a unicast receiver in addresses 1 shall be sent on any supported data rate selected by a rate switching mechanism (whose output is an internal MAC variable called `MACCurrentRate`, which is used for calculating the Duration/ID field of each frame). ~~An. No STA shall not transmit a unicast frame~~ at a rate that is ~~known not to be supported~~ by the destination STA, as reported in any Supported Rates and Extended Supported Rates element in the management frames. For frames of type Data + CF – ACK, Data + CF – Poll + CF – ACK, and CF – Poll + CF – ACK, the rate chosen to transmit the frame should be supported by both the addressed recipient STA and the STA to which the ACK is intended.

Under no circumstances shall a STA initiate transmission of a data or management frame at a data rate higher than the greatest rate in the `OperationalRateSet`, a parameter of the `MLME_JOIN.request` primitive.

To allow the transmitting STA to calculate the contents of the Duration/ID field, ~~the responding a STA responding to a received frame~~ shall transmit its Control Response and Management Response frames (either CTS or ACK) frames at the highest rate in the `BSSBasicRateSet` that is less than or equal to the rate of the immediately previous frame in the frame exchange sequence (as defined in 9.7) ~~and that is of the same modulation type as the received frame~~. If no rate in the basic rate set meets these conditions, then the control frame sent in response to a received frame shall be transmitted at the highest mandatory rate of the PHY that is less than or equal to the rate of the received frame, and that is of the same modulation type as the received frame. In addition, the Control Response frame shall be sent using the same PHY options as the received frame, ~~unless they conflict with the requirement to use the BSSBasicRateSet~~.

An alternative rate for the control response frame may be used, provided that the duration of the control response frame at the alternative rate is the same as the duration of the control response frame at the originally chosen rate and the alternative rate is in either the `BSSBasicRateSet` or the mandatory rate set of the PHY and the modulation of the control response frame at the alternative rate is the same type as that of the received frame.

~~For the HR/DSSS PHY, the time required to transmit a frame for use in the Duration/ID field is determined using the PLME-TXTIME.request primitive and the PLME-TXTIME.confirm primitive (see 10.4.7).~~

For the 5-GHz PHY clause 17, 18, and 19 PHYs, the time required to transmit a frame for use in the Duration/ID field is determined using the `PLME-TXTIME.request` primitive (see 10.4.6) and the `PLME-TXTIME.confirm` primitive (see 10.4.7) ~~The calculation method of TXTIME duration is defined in 17.4.3, both defined in 17.4.3, 18.3.4, 19.8.3.1, 19.8.3.2, or 19.8.3.3 depending on the PHY options.~~

## 9.7 Frame exchange sequences

*Change the first two rows and insert a row to Table 21:*

Sequence	Frames In Sequence	Usage
<u>{CTS-}</u> Data(bc/mc)	1 <u>or</u> 2	Broadcast or multicast MSDU
<u>{CTS-}</u> Mgmt(bc)	1 <u>or</u> 2	Broadcast MMPDU
<u>CTS – [Frag – ACK –] Last – ACK</u>	<u>3 or more</u>	<u>Protected directed MSDU or MMPDU</u>

*Insert a new subclause to the end of clause 9*

## 9.10 Protection mechanism

The intent of a protection mechanism is to ensure that a STA does not transmit an MPDU of type Data or an MMPDU with an ERP-OFDM preamble and header unless it has attempted to update the NAV of receiving NonERP STAs. The updated NAV period shall be longer than or equal to the total time required to send the data

and any required response frames. ERP STAs shall use protection mechanisms (such as RTS / CTS or CTS to self) for ERP-OFDM MPDUs of type Data or an MMPDU when the Use\_Protection field of the ERP Information element is set to 1 (see the requirements of 9.2.6). Protection mechanisms frames shall be sent using one of the mandatory clause 15 or clause 18 rates and using one of the mandatory clause 15 or clause 18 waveforms so all STAs in the BSA will know the duration of the exchange even if they cannot detect the ERP-OFDM signals using their CCA function.

Note that when using the clause 19 options: ERP-PBCC or DSSS-OFDM there is no need to use protection mechanisms, as these frames start with a DSSS header.

In the case of a BSS composed of only ERP STAs, but with knowledge of a neighboring co-channel BSS having NonERP traffic; the AP may require protection mechanisms to protect the BSS's traffic from interference. This will provide propagation of NAV to all attached STA and all STA in a neighboring co-channel BSS within range by BSS basic rate set modulated messages. The frames that propagate the NAV throughout the BSS include:

RTS/CTS/ACK frames, all data frames with the 'more fragments' field set to 1, all data frames sent in response to PS-Poll that are not proceeded in the frame sequence by a data frame with the 'more fragments' field set to 1, Beacon frames with non-zero CF time, and CF-End frames.

When RTS/CTS is used as the protection mechanism, there exist cases such as NAV resetting (discretionary, as indicated in 9.2.5.4) where a hidden station may reset its NAV and this may cause a collision. The likelihood of occurrence is low and it is not considered to represent a significant impairment to overall system operation. A mechanism to address this possible situation would be to use alternative protection mechanisms, or to revert to alternate modulation methods.

If a protection mechanism is being used, a fragment sequence may only employ ERP-OFDM modulation for the final fragment and control response.

The rules for calculating RTS/CTS NAV fields are unchanged when using RTS/CTS as a protection mechanism.

Additionally, if any of the rates in the BSSBasicRateSet of the protection mechanism frame transmitting STA's BSS are clause 15 or clause 18 rates, then the protection mechanism frames shall be sent at one of those clause 15 or clause 18 basic rates.

## 10 Layer management

### 10.4 PLME SAP interface

#### 10.4.4.2 PLME-DSSSTESTMODE.request

*Change values in the table in 10.4.4.2 for the new rates*

Name	Type	Valid range	Description
DATA_RATE	Integer	2, 4, 11, <u>12</u> , 18, 22, <u>24</u> , 36, 44, <u>48</u> , 66, 72, 96, 108	Selects <u>among rates</u> 02 = 1 Mbit/s 04 = 2 Mbit/s 11 = 5.5 Mbit/s <u>12 = 6 Mbit/s</u> <u>18 = 9 Mbit/s</u> 22 = 11 Mbit/s <u>24 = 12 Mbit/s</u> <u>36 = 18 Mbit/s</u> <u>44 = 22 Mbit/s</u> <u>48 = 24 Mbit/s</u> <u>66 = 33 Mbit/s</u> <u>72 = 36 Mbit/s</u> <u>96 = 48 Mbit/s</u> <u>108 = 54 Mbit/s</u>
MODULATION_CODE_TYPE	<u>Integer</u> <del>Boolean</del>	null, 0, 1, <u>2</u>	Selects <del>the</del> <u>among</u>

			<del>modulation code options</del> 0 = <del>no optional modulation</del> modes <del>CCK</del> 1 = <del>optional ERP-PBCC</del> modes 2 = <del>optional DSSS-OFDM</del> modes
--	--	--	--

## 18 High rate direct sequence spread spectrum (HR/DSSS) PHY specification

### 18.2 High Rate PLCP sublayer

#### 18.2.2 PPDU Format

*Change subclause 18.2.2.2 as follows:*

##### 18.2.2.2 Short PPDU format

The short PLCP preamble and header (HR/DSSS/short) is defined as optional for HR/DSSS. The Short Preamble and header may be used to minimize overhead and, thus, maximize the network data throughput. The format of the PPDU, with HR/DSSS/short, is depicted in Figure 132. For clause 19 STAs, support of this preamble type is mandatory.

*Insert new Clause 19 as follows:*

## 19 Extended rate PHY specification

### 19.1 Overview

This clause specifies further rate extension of the PHY for the Direct Sequence Spread Spectrum (DSSS) system of clause 15 and the extensions of clause 18. Hereinafter the PHY defined in this clause will be known as the Extended Rate PHY (ERP). This PHY operates in the 2.4 GHz ISM band.

#### 19.1.1 Introduction

The ERP builds on the payload data rates of 1 and 2 Mbit/s as described in clause 15 that use DSSS modulation and builds on the payload data rates of 1, 2, 5.5 and 11 Mbit/s as described in clause 18 that use DSSS, CCK and optional PBCC modulations. The ERP draws from clause 17, to provide additional payload data rates of 6, 9, 12, 18, 24, 36, 48, and 54 Mbit/s. Of these rates, transmission and reception capability for 1, 2, 5.5, 6, 12, and 24 Mbit/s data rates is mandatory.

Two additional optional ERP-PBCC modulation modes with payload data rates of 22 and 33 Mbit/s are defined. An ERP-PBCC station may implement 22 Mbit/s alone or 22 and 33 Mbit/s. An optional modulation mode known as DSSS-OFDM is also incorporated with payload data rates of 6, 9, 12, 18, 24, 36, 48 and 54 Mbit/s.

#### 19.1.2 Operational modes

The radio portion of all clause 19 compliant Extended Rate PHY (ERP) systems implements all mandatory modes of clauses 17 and 18, except it uses the 2.4 GHz frequency band and channelization plan specified in 18.4.6. The Extended Rate PHY has the capability to decode all clause 15 and 18 PLCPs and all ERP-OFDM PLCPs. In addition, it is mandatory that all ERP compliant equipment be capable of sending and receiving the short preamble that is (and remains) optional for clause 18 PHYs.

The Extended Rate PHY has the capability to detect ERP and clause 18 preambles whenever a clear channel assessment (CCA) is requested. Since protection mechanism are not required in all cases, the ERP CCA mechanisms for all preamble types shall be active at all times.

An ERP BSS is capable of operating in any combination of available ERP modes (Clause 19 PHYs) and NonERP modes (Clause 15 or Clause 18 PHYs). For example, a BSS could operate in an ERP-OFDM only mode, a mixed mode of ERP-OFDM and ERP-DSSS/CCK, or a mixed mode of ERP-DSSS/CCK and NonERP. When options are enabled, combinations are also allowed.

The changes to the base standard required to implement the Extended Rate PHY (ERP) are summarized as follows.

- ERP-DSSS/CCK
  - The PHY uses the capabilities of clause 18 with the following exceptions:
    - Support of the short PLCP PPDU header format capability of 18.2.2.2 is mandatory
    - Clear Channel Assessment (CCA ref 18.4.8.4) has a mechanism that will detect all mandatory clause 19 sync symbols
    - The maximum input signal level (ref 18.4.8.2) is  $-20$  dBm
    - Locking the transmit center frequency and the symbol clock frequency to the same reference oscillator is mandatory.
- ERP-OFDM
  - The PHY uses the capabilities of clause 17 with the following exceptions:
    - The frequency plan is in accordance with sub clauses 18.4.6.1 and 18.4.6.2 instead of 17.3.8.3.
    - CCA has a mechanism that will detect all mandatory clause 19 sync symbols
    - The frequency accuracy (ref 17.3.9.4 and 17.3.9.5) is  $\pm 25$  PPM.

- The maximum input signal level (ref 17.3.10.4) is  $-20$  dBm.
- The slot time is  $20\text{ }\mu\text{s}$  in accordance with 18.3.3 except that an optional  $9\text{ }\mu\text{s}$  slot time may be used when the BSS consists of only ERP STAs.
- SIFS time is  $10\text{ }\mu\text{s}$  in accordance with 18.3.3. See 19.3.2.3 for more detail.
- ERP-PBCC (Optional)
  - This is a single carrier modulation scheme that encodes the payload using a 256-state packet binary convolutional code. These are extensions to the PBCC modulation in clause 18. ERP-PBCC modes with payload data rates of 22 and 33 Mbit/s are defined in 19.6.
- DSSS-OFDM (Optional)
  - This is a hybrid modulation combining a DSSS preamble and header with an OFDM payload transmission. DSSS-OFDM modes with payload data rates of 6, 9, 12, 18, 24, 36, 48 and 54 Mbit/s are defined in 19.7.
  - If the optional DSSS-OFDM mode is used, the supported rates in that mode are the same as the ERP-OFDM supported rates.

The 2.4 GHz ISM band is a shared medium and co-existence with other devices such as clause 15 and clause 18 STAs is an important issue for maintaining high performance in 802.11 clause 19 (ERP) STAs. The ERP modulations (ERP-OFDM, ERP-PBCC, and DSSS-OFDM) have been designed to coexist with existing clause 15 and clause 18 STAs. This coexistence is achieved by several means including virtual carrier sense (RTS/CTS or CTS-to-self), carrier sense and collision avoidance protocols, and MSDU fragmentation.

### 19.1.3 Scope

This clause specifies the Extended Rate PHY entity and the deviations from earlier clauses to accommodate it. It is organized by reference to the relevant earlier clauses to avoid excessive duplication.

The Extended Rate PHY layer consists of the following two protocol functions:

- a) A physical layer convergence function that adapts the capabilities of the physical medium dependent (PMD) system to the PHY service available. This function is supported by the PHY layer convergence procedure (PLCP), which defines a method for mapping the MAC sublayer protocol data units (MPDU) into a framing format suitable for sending and receiving user data and management information between two or more STAs using the associated PMD system. The PHY exchanges PHY protocol data units (PPDU) that contain PLCP service data units (PSDU). The MAC uses the PHY service, so each MPDU corresponds to a PSDU that is carried in a PPDU.
- b) A PMD system, whose function defines the characteristics and method of transmitting and receiving data through a wireless medium between two or more STAs; each using the Extended Rate PHY.

### 19.1.4 Extended rate PHY functions

The architecture of the Extended Rate PHY is depicted in the ISO/IEC basic reference model shown in Figure 141 of 18.4.1. The Extended Rate PHY contains three functional entities: the PMD function, the PHY convergence function (PLCP), and the layer management function.

The Extended Rate PHY service is provided to the MAC through the PHY service primitives described in Clause 12. Interoperability is addressed by use of the carrier sense mechanism specified in 9.2.1 and the protection mechanism in 9.10. This mechanism allows NonERP stations to know of ERP traffic that they cannot demodulate so that they may defer the medium to that traffic.

## 19.2 PHY specific service parameter list

The architecture of the IEEE 802.11 MAC is intended to be PHY independent. Some PHY implementations require PHY-dependent MAC state machines running in the MAC sublayer in order to meet certain PMD requirements. The PHY-dependent MAC state machine resides in a sublayer defined as the MAC sublayer management entity (MLME). In certain PMD implementations, the MLME may need to interact with the PLME as part of the normal

PHY SAP primitives. These interactions are defined by the PLME parameter list currently defined in the PHY service primitives as TXVECTOR and RXVECTOR. The list of these parameters, and the values they may represent, are defined in the specific PHY specifications for each PMD. This subclause addresses the TXVECTOR and RXVECTOR for the ERP. The service parameters for RXVECTOR and TXVECTOR shall follow 17.2.2 and 17.2.3.

Several service primitives include a parameter vector. DATARATE and LENGTH are described in 12.3.4.4. The remaining parameters are considered to be management parameters and are specific to this PHY.

The parameters in Table 19.2-1 are defined as part of the TXVECTOR parameter list in the PHY-TXSTART.request service and PLME-TXTIME.request primitives.

**Table 19.2-1 TXVECTOR parameters**

Parameter	Value
DATARATE	<p>The rate used to transmit the PSDU in Mbit/s</p> <p>Allowed value depends on value of MODULATION parameter:</p> <p>ERP-DSSS: 1 and 2</p> <p>ERP-CCK: 5.5 and 11</p> <p>ERP-OFDM: 6, 9, 12, 18, 24, 36, 48, and 54</p> <p>ERP-PBCC: 5.5, 11, 22, and 33.</p> <p>DSSS-OFDM: 6, 9, 12, 18, 24, 36, 48, and 54</p>
LENGTH	<p>The length of the PSDU in octets</p> <p>Range: 1-4095</p>
PREAMBLE_TYPE	<p>The preamble used for the transmission of the PPDU</p> <p>Enumerated type for which the allowed value depends on value of MODULATION parameter:</p> <p>ERP-OFDM: null</p> <p>ERP-DSSS, ERP-CCK, ERP-PBCC, DSSS-OFDM: SHORTPREAMBLE, LONGPREAMBLE.</p>
MODULATION	<p>The modulation used for the transmission of this PSDU</p> <p>Enumerated type: ERP-DSSS, ERP-CCK, ERP-OFDM, ERP-PBCC, DSSS-OFDM</p>
SERVICE	<p>The scrambler initialization vector</p> <p>When the modulation format selected is ERP-OFDM or DSSS-OFDM, 7 null bits are used for scrambler initialization as described in 17.3.5.1. The remaining bits are reserved.</p> <p>For all other ERP modulations which all start with ERP-DSSS short or long preamble, the bits of the SERVICE field are defined in table 19.3.2.1 and the SERVICE field is not applicable in the TXVECTOR, so the entire field is reserved.</p>
TXPWR_LEVEL	<p>The transmit power level. The definition of these levels is up to the implementer.</p> <p>1-8</p>

The parameters in Table 19.2-2 are defined as part of the RXVECTOR parameter list in the PHY-RXSTART.indicate service primitive. When implementations require the use of these vectors, some or all of these parameters may be used in the vectors.

**Table 19.2-2 RXVECTOR parameters**

Parameter	Value
DATARATE	The rate at which the PSDU was received in Mbit/s.  Allowed value depends on value of MODULATION parameter:  ERP-DSSS: 1 and 2  ERP-CCK: 5.5 and 11  ERP-OFDM: 6, 9, 12, 18, 24, 36, 48, and 54  ERP-PBCC: 5.5, 11, 22, and 33  DSSS-OFDM: 6, 9, 12, 18, 24, 36, 48, and 54
LENGTH	The length of the PSDU in octets.  Range: 1-4095
PREAMBLE_TYPE	The preamble type detected during reception of the PPDU.  Enumerated type for which the allowed value depends on value of MODULATION parameter:  ERP-OFDM: null  ERP-DSSS, ERP-CCK, ERP-PBCC, PBCC, DSSS-OFDM: SHORTPREAMBLE, LONGPREAMBLE.
MODULATION	The modulation used for the reception of this PSDU.  Enumerated types: ERP-DSSS, ERP-CCK, ERP-OFDM, ERP-PBCC, DSSS-OFDM
SERVICE	Null.
RSSI	The RSSI is a measure of the RF energy received by the ERP. The 8-bit value is in the range of 0 to RSSI maximum as described in 17.2.3.2.

## 19.3 Extended rate PLCP sublayer

### 19.3.1 Introduction

This subclause provides a PHY layer convergence procedure (PLCP) for the ERP. The convergence procedure specifies how PSDUs are converted to and from PPDU at the transmitter and receiver. The PPDU is formed during data transmission by appending the PSDU to the extended rate PLCP preamble and header. At the receiver, the PLCP preamble and header are processed to aid in the demodulation and delivery of the PSDU.

### 19.3.2 PPDU format

An ERP STA shall support three different preamble and header formats. The first is the Long Preamble and header described in 19.3.2.1 (and based on 18.2.2.1 with redefinition of reserved bits defined therein). This PPDU provides interoperability with clause 18 STAs when using the 1, 2, 5.5, and 11 Mbit/s data rates, the optional DSSS-OFDM modulation at all OFDM rates, and the optional ERP-PBCC modulation at all ERP-PBCC rates. The second is the Short Preamble and header described in 19.3.2.2 (and based on 18.2.2.2 wherein it is optional). The short preamble

supports the rates 2, 5.5, and 11 Mbit/s as well as DSSS-OFDM and ERP-PBCC. The third is the ERP-OFDM preamble and header specified in 19.3.2.3 (and based on 17.3.2). The ERP has two optional PPDU formats, described in 19.3.2.4 and 19.3.2.5, to support the optional DSSS-OFDM modulation rates.

### 19.3.2.1 Long preamble PPDU format

Figure 131 of 18.2.2.1 shows the basic format for the long preamble PPDU. This preamble is appropriate for use with the 1, 2, 5.5, 11 Mbit/s (clause 18) modes and is compatible with BSSs using these modes. To support the optional modes included in the ERP, the Long Preamble PPDU only differs from 18.2.2.1 in the following:

- a) The use of one bit in the SERVICE field to indicate when the optional ERP-PBCC mode is being used.
- b) The use of two additional bits in the SERVICE field to resolve the length ambiguity when the optional ERP-PBCC-22 and ERP-PBCC-33 modes are being used.
- c) Three additional optional rates given by the following SIGNAL field octets where the lsb is transmitted first in time:
  - X'DC' (msb to lsb) for 22 Mbit/s ERP-PBCC
  - X'21' (msb to lsb) for 33 Mbit/s ERP-PBCC
  - X'1E' (msb to lsb) for all DSSS-OFDM rates

Three bits of the SERVICE field have been defined to support the optional modes of the ERP standard. Table 19.3.2.1 shows graphically the assignment of the bits within the SERVICE field. The bits b0, b1 and b4 are reserved and shall be set to 0. Bit b2 is used to indicate that the transmit frequency and symbol clocks are derived from the same oscillator. For all ERP systems, the Locked Clock Bit shall be set to 1. Bit b3 is used to indicate if the data is modulated using the optional ERP-PBCC modulation. Bit b3 is defined in 18.2.3.4 with the caveat that the ERP-PBCC mode now has the additional optional rates of 22 and 33 Mbit/s as defined in 19.3.3.2. Bits b5, b6, and b7 are used to resolve data field length ambiguities for the optional ERP-PBCC-11 through ERP-PBCC-33 modes. These bits are fully defined in 19.6. Bit b7 is also used to resolve data field length ambiguities for the CCK 11 Mbit/s mode and is defined in 18.2.3.5. Bits b3, b5, and b6 are set to 0 for CCK.

**Table 19.3.2.1 —SERVICE field bit definitions**

b0	b1	b2	b3	b4	b5	b6	b7
Reserved	Reserved	Locked Clock Bit 0 = not locked 1 = locked	Modulation Selection 0 = Not ERP-PBCC 1 = ERP-PBCC	Reserved	Length Extension Bit (ERP-PBCC)	Length Extension Bit (ERP-PBCC)	Length Extension Bit

#### 19.3.2.1.1 ERP PLCP length field calculation

For the long and short preamble modes other than PBCC, the length field shall be calculated as in 18.2.3.5

#### 19.3.2.1.2 ERP-PBCC PLCP length (LENGTH) field calculation

For the ERP-PBCC PLCP length field the transmitted value shall be determined from the LENGTH and DataRate parameters in the TXVECTOR issued with the PMD-TXSTART.request primitive described in 18.4.5.6.

The length field provided in the TXVECTOR is in octets and is converted to microseconds for inclusion in the PLCP LENGTH field. The Length Extension bits are provided to resolve the ambiguity in the number of octets that is described by an integer number of microseconds for any data rate over 8 Mb/s. These bits are used to indicate which of the smaller potential number of octets is correct.

- a) 11 Mbit/s PBCC see 18.2.3.5
- b) 22 Mbit/s ERP-PBCC Length = (number of octets + 1)\*4/11, rounded up to the next integer; the SERVICE field b6 and b7 bits shall each indicate a 0 if the rounding took less than 4/11ths; the

SERVICE field bit b6 shall indicate a 0 and the SERVICE field bit b7 shall indicate a 1 if the rounding took 4/11ths or more and less than 8/11ths; and the SERVICE field bit b6 shall indicate a 1 and the SERVICE field bit b7 shall indicate a 0 if the rounding took 8/11ths or more.

- c) 33 Mbit/s ERP-PBCC      Length = (number of octets + 1)\*8/33, rounded up to the next integer; the SERVICE field b5, b6, and b7 bits shall each indicate a 0 if the rounding took less than 8/33; the SERVICE field bit b5 shall indicate a 0, b6 shall indicate a 0 and the SERVICE field bit b7 shall indicate a 1 if the rounding took more than or equal to 8/33 and less than 16/33; the SERVICE field bit b5 shall indicate 0, b6 shall indicate a 1 and b7 shall indicate a 0 if the rounding took more than or equal to 16/33 and less than 24/33; the SERVICE field bit b5 shall indicate 0, b6 shall indicate a 1 and b7 shall indicate a 1 if the rounding took more than or equal to 24/33 and less than 32/33; the SERVICE field bit b5 shall indicate 1, b6 shall indicate a 0 and b7 shall indicate a 0 if the rounding took 32/33 or more.

At the receiver, the number of octets in the MPDU is calculated as follows:

- a) 22 Mbit/s ERP-PBCC Number of octets = (Length \* 11/4) – 1, rounded down to the next integer, minus 1 if the SERVICE field bit b6 is a 0 and the SERVICE field bit b7 is a 1, or minus 2 if the SERVICE field bit b6 is a 1 and the SERVICE field bit b7 is a 0.
- b) 33 Mbit/s ERP-PBCC Number of octets = (Length \* 33/8) – 1, rounded down to the next integer, minus 1 if the SERVICE field bit b5 is a 0, b6 is a 0, and the SERVICE field bit b7 is a 1, or minus 2 if the SERVICE field bit b5 is a 0, b6 is a 1, and the SERVICE field bit b7 is a 0, or minus 3 if the SERVICE field bit b5 is a 0, b6 is a 1, and the SERVICE field bit b7 is a 1, or minus 4 if the SERVICE field bit b5 is a 1, b6 is a 0, and the SERVICE field bit b7 is a 0.

Table 19.3.2.2 shows an example calculation for several packet lengths of ERP-PBCC at 22 Mbit/s:

**Table 19.3.2.2 – Example of LENGTH calculations for ERP-PBCC-22**

TX Octets	(Octets+1) * 4/11	LENGTH	Length Extension bit b6	Length Extension bit b7	LENGTH * 11/4	floor(X)	RX Octets
1023	372.364	373	0	1	1025.75	1025	1023
1024	372.727	373	0	0	1025.75	1025	1024
1025	373.091	374	1	0	1028.50	1028	1025
1026	373.455	374	0	1	1028.50	1028	1026

### 19.3.2.2 Short preamble PPDU format

Figure 132 of 18.2.2.2 shows the basic format for the short preamble PPDU. For the ERP, support for this preamble is mandatory. The short preamble is appropriate for use with 2, 5.5, and 11 Mbit/s modes. The bits of the Short PLCP SERVICE field and RATE field are the same as for the Long PLCP SERVICE field and RATE field and are defined in 19.3.2.1.

### 19.3.2.3 ERP-OFDM PPDU format

The format, preamble, and headers for the ERP-OFDM PLCP PPDU are described in 17.3.2 through 17.3.5. For the ERP-OFDM modes, the DATA Field that contains the SERVICE field, the PSDU, the TAIL bits, and the PAD bits shall follow 17.3.5

For ERP-OFDM modes, an ERP packet is followed by a period of no transmission with a length of 6 μs called the signal extension. Its purpose of this extension is to make the TXTIME calculation in 19.8.3 result in a transmission duration interval that includes an additional 6 μs. The SIFS time for clause 17 packets is 16 μs and the SIFS time for clause 18 packets is 10 μs. The longer SIFS time in clause 17 is to allow extra time for the convolutional decode

process to finish. Since clause 19 packets will use a SIFS time of 10  $\mu$ s, this extra 6  $\mu$ s length extension is used to ensure that the Transmitter computes the Duration field in the MAC header incorporating the 6  $\mu$ s of “idle time” following each ERP-OFDM transmission. This ensures that the NAV value of clause 18 STAs is set correctly.

The “carrier-sense mechanism” described in 9.2.1 combines the NAV state and the STA’s transmitter status with physical carrier sense to determine the busy/idle state of the medium. The time interval between frames is called the inter frame spacing (IFS). A STA shall determine that the medium is idle through the use of the CCA mechanism for the interval specified. The starting reference of slot boundaries is the end of the last symbol of the previous frame on the medium. For ERP-OFDM frames, this includes the length extension. For ERP-OFDM frames, a STA shall generate the PHY RX\_END indication, 6  $\mu$ s after the end of the last symbol of the previous frame on the medium. This adjustment shall be performed by the STA based on local configuration information set using the PLME SAP.

19.3.2.4 DSSS-OFDM long preamble PPDU format

Both long and short preambles and headers as previously described in 19.3.2.1 and 19.3.2.2 are used with DSSS-OFDM.

For all DSSS-OFDM rates and preamble modes, the PLCP SIGNAL Field described in 18.2.3.3 shall be set to a 3 Mbit/s value. That is, the eight-bit value is set to X’1E’ (msb to lsb). For DSSS-OFDM, this value is simply a default setting used for BSS compatibility and to insure that NonERP stations read the length field and defer the medium for that time even though they cannot demodulate the MPDU due to unsupported rates.

Figure 19.3.2.4 shows the PPDU format for the long preamble case. As seen, the PSDU is appended to the PLCP Preamble and the PLCP header. The PLCP Preamble is the same as described in 18.2.3.1 and 18.2.3.2. The PLCP header is similar to the one described in 19.3.2.1. The PSDU has a format that is nearly identical to a clause 17 PLCP. The differences are described in 19.3.3.4.

The scrambler of 18.2.4 is used to scramble the DSSS-OFDM PLCP header and the scrambler in 17.3.5.4 is used to scramble the data symbols in the OFDM segment.

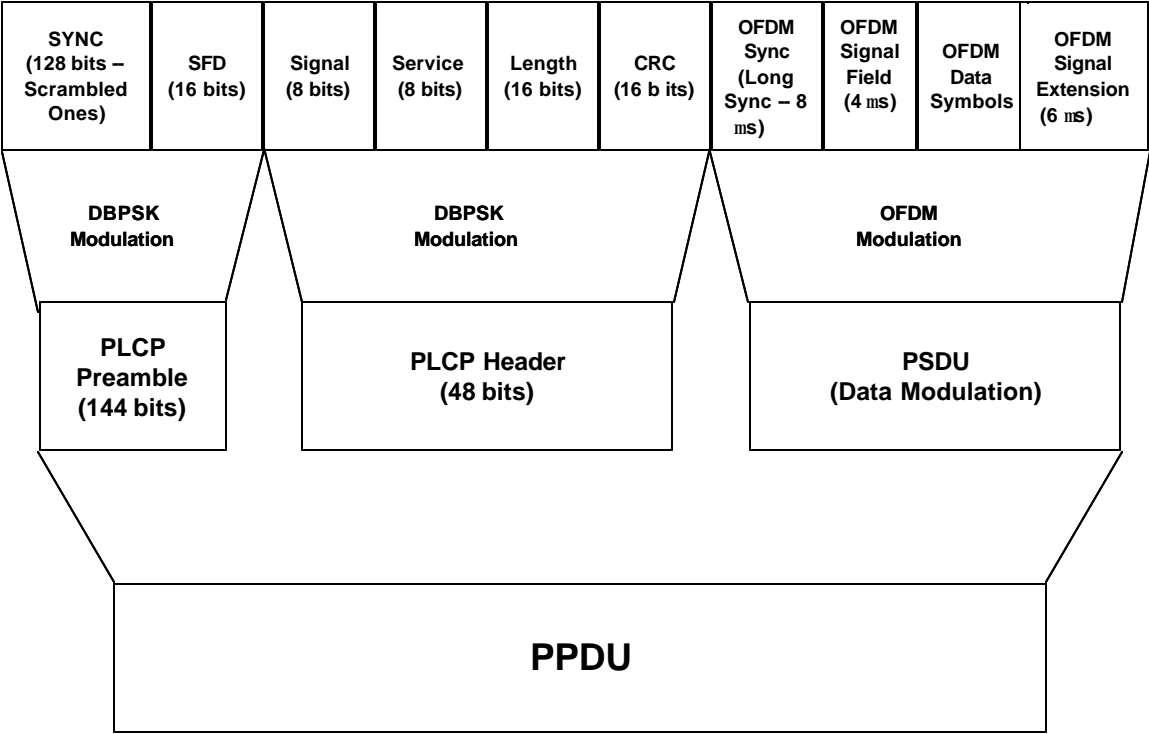


Figure 19.3.2.4 – Long preamble PPDU format for DSSS-OFDM

#### 19.3.2.4.1 DSSS-OFDM PLCP length field calculation

For both the long and the short preamble PLCP cases, the length field calculation in terms of data packet length is as follows.

$$\text{LENGTH} = \text{PSDUsyncOFDM} + \text{PSDUSignalOFDM} + \dots \\ 4 \times \text{Ceiling}((\text{PLCPServiceBits} + 8 \times (\text{NumberOfOctets}) + \text{PadBits}) / N_{\text{DBPS}}) + \text{SignalExtension}$$

Where:

PSDUsyncOFDM is 8  $\mu$ s (OFDM long training symbols);

PSDUSignalOFDM is 4  $\mu$ s;

ceiling is a function that returns the smallest integer value greater than or equal to its argument value;

PLCPServiceBits is 8 bits;

NumberOfOctets is the number of data octets in the PSDU;

PadBits is 6 bits;

$N_{\text{DBPS}}$  is the number of data bits per OFDM symbol;

SignalExtension is 6  $\mu$ s.

The length field is defined in units of microseconds and shall correspond to the calculated length of the PSDU. Note that the length extension bits in the Signal field are not needed or used for DSSS-OFDM.

#### 19.3.2.5 Short DSSS-OFDM PLCP PDU format

The short PLCP preamble and header are used to maximize the throughput by reducing the overhead associated with the preamble and header. Figure 19.3.2.5 shows the short preamble PLCP PDU format. As seen, the PSDU is appended to the PLCP Preamble and the PLCP header. The short PLCP Preamble is described in 18.2.3.8 and 18.2.3.9. The PLCP header is as described in 19.3.2.4. The PSDU has a format that is nearly identical to clause 17 PLCP. The differences are described in 19.3.3.4.

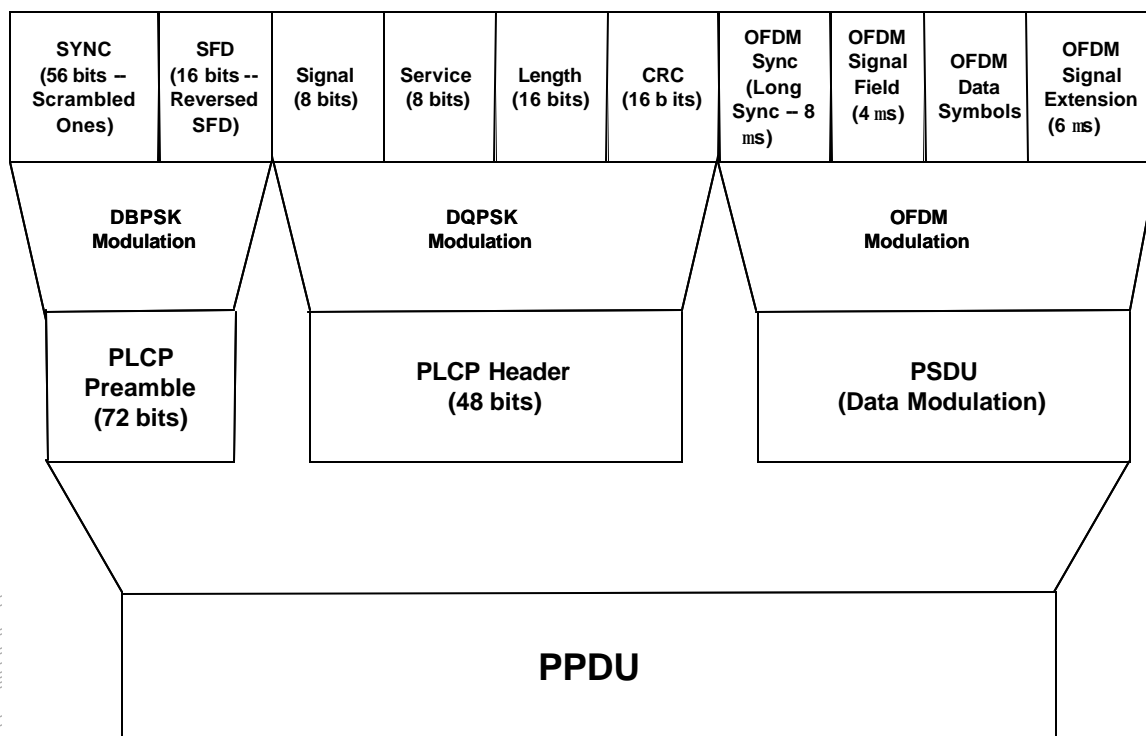


Figure 19.3.2.5 – Short preamble PPDU format for DSSS-OFDM

### 19.3.3 PLCP data modulation and rate change

#### 19.3.3.1 Long and short preamble formats

The long and short PLCP preamble and the long PLCP header shall be transmitted using the 1 Mbit/s DBPSK modulation. The short PLCP header shall be transmitted using the 2 Mbit/s modulation. The SIGNAL and SERVICE fields combined shall indicate the modulation and rate that shall be used to transmit the PSDU. The transmitter and receiver shall initiate the modulation and rate indicated by the SIGNAL and SERVICE fields, starting with the first octet of the PSDU. The PSDU transmission rate shall be set by the DATARATE parameter in the TXVECTOR, issued with the PHY-TXSTART.request primitive described in 18.4.5.1.

Four modulation formats are mandatory, 1 and 2 Mbit/s ERP-DSSS and 5.5 and 11 Mbit/s ERP-CCK, and are specified in 18.4.6.3.

Four optional ERP-PBCC modulation formats and data rates are specified for the Enhanced Rate PHY (ERP). They shall be based on Packet Binary Convolutional Coding (PBCC) 5.5, 11, 22, and 33 Mbit/s modulations. The rates of 5.5 and 11 Mbit/s are described in 18.4.6.6. No change in the spectral mask of 18.4.7.3 is required for these modes.

#### 19.3.3.2 ERP-PBCC 22 Mbit/s and 33 Mbit/s formats

In the PBCC encoder, incoming data is first encoded with a packet binary convolutional code. A cover code (as defined in PBCC modes in 18.4.6.6) is applied to the encoded data prior to transmission through the channel.

The packet binary convolutional code that is used is a 256-state, rate 2/3 code. The generator matrix for the code is given as


$$G = \begin{bmatrix} 1 + D^4 & D & D + D^3 \\ D^3 & 1 + D^2 + D^4 & D + D^3 \end{bmatrix}$$

In octal notation, the generator matrix is given by

$$\mathbf{G} = \begin{bmatrix} 21 & 2 & 12 \\ 10 & 25 & 12 \end{bmatrix}$$

Since the system is frame (PPDU) based, the encoder shall be in state zero, i.e., all memory elements contain zero, at the beginning of every PPDU. The encoder shall also be placed in a known state at the end of every PPDU to prevent the data bits near the end of the PPDU from being decoded incorrectly. This is achieved by appending one octet containing all zeros to the end of the PPDU prior to transmission and discarding the final octet of each received PPDU.

An encoder block diagram is shown in Figure 19.3.3.2-1. It consists of two paths of four memory elements each. For every pair of data bits input, three output bits are generated. The output of the convolutional code is mapped to an 8-PSK constellation; each 3-bit output sequence from the packet binary convolutional encoder is used to produce one symbol. This yields a throughput of two information bits per symbol. In ERP-PBCC-22 and ERP-PBCC-33, the input data stream is divided into pairs of adjacent bits. In each pair, the first bit is fed to the upper input of the convolutional encoder, and the second is fed to the lower input of the convolutional encoder. An illustration of the mapping for the  $j$ th ( $j \geq 0$ ) pair of input bits ( $b_{2j}, b_{2j+1}$ ) is given in Figure 19.3.3.2-1.

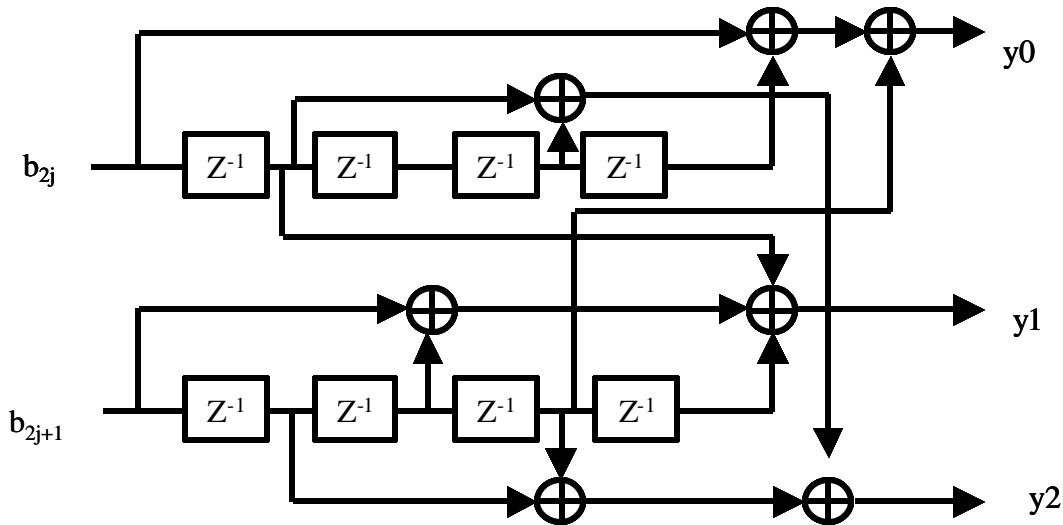

**Figure 19.3.3.2-1 22/33 Mbit/s ERP-PBCC convolutional encoder**

The phase of the first complex chip of the 22 Mbit/s PSDU shall be defined with respect to the phase of the last chip of the PCLP header, i.e., the last chip of the CRC check. The phase of the first complex chip of the 33 Mb/s PSDU shall be defined with respect to the phase of the last chip of the clock switch section, i.e., the last chip of the ReSync field. The bits ( $y_2 y_1 y_0$ ) = (0,0,0) shall indicate the same phase as the last chip of the CRC check. The other seven combinations of ( $y_2 y_1 y_0$ ) shall be defined with respect to this reference phase as shown in Figure 19.3.3.2-2.

The mapping from BCC outputs to 8-PSK constellation points is determined by a pseudo-random cover sequence. The cover sequence is the same one as described in 18.4.6.6. The current binary value of this sequence at every given point in time is taken as shown in Figure 19.3.3.2-2. The mapping is shown in Figure 19.3.3.2-2.

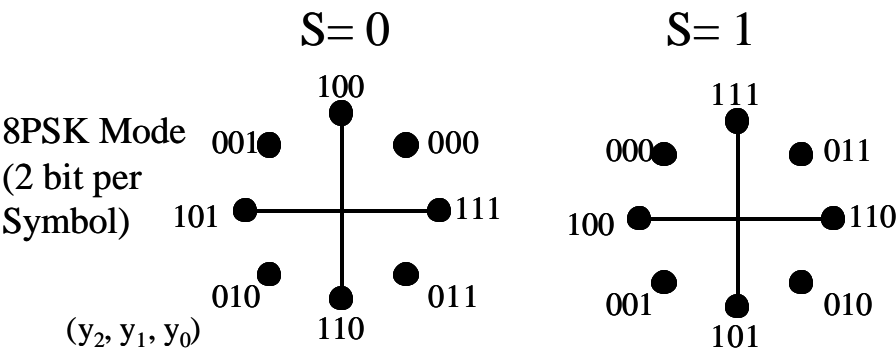


Figure 19.3.3.2-2 – ERP-PBCC-22 and ERP-PBCC-33 cover code mapping

ERP-PBCC mode achieves a 33 Mbit/s data rate by using a 16.5 MHz clock for the data portion of the packet. The data portion is otherwise identical to the 22 Mbit/s ERP-PBCC modulations. The structure and clock speed of the preamble is the same as in clause 18. An extra clock switch section between the preamble and the data portion is added, with the format described below. The same pulse shape shall be used in each clock domain.

When the clock is switched from 11MHz to 16.5MHz the clock switching structure in Figure 19.3.3.2-3 is used:

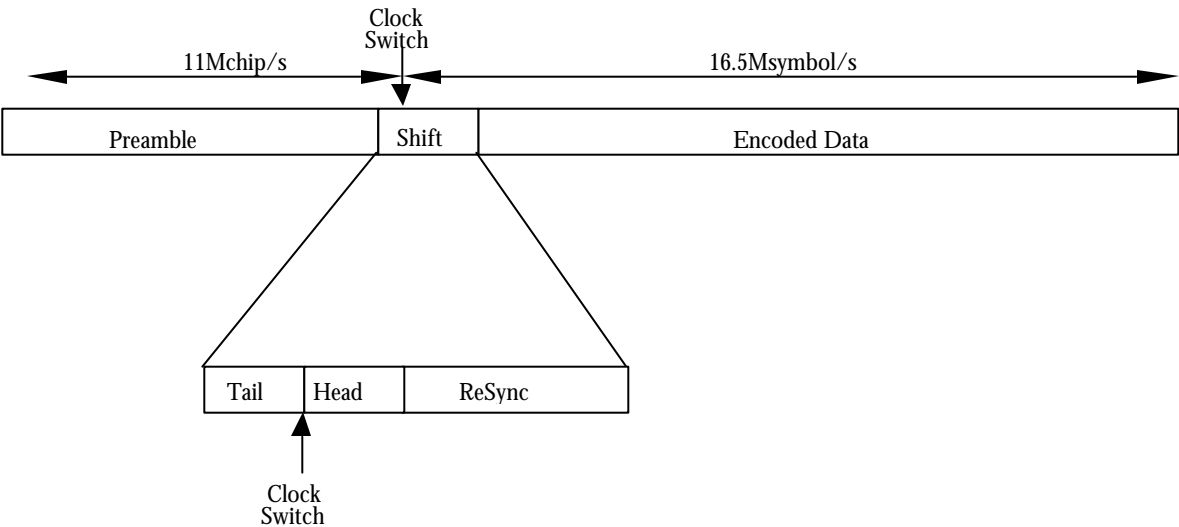


Figure 19.3.3.2-3 33 Mbit/s clock switching

The tail is 3 clock cycles at 11Mchip/s and the head is 3 clock cycles at 16.5 Msymbol/s (QPSK). The resync is 9 clock cycles at 16.5 Msymbol/s. The total clock switching time (tail & head & resync) is 1  $\mu$ s. The tail bits are 1 1 1, the head bits are 0 0 0, and the resync bits are 1 0 0 1 1 1 0 1. The modulation is BPSK that is phase synchronous with the previous symbol.

### 19.3.3.3 ERP-OFDM format

PLCP modulation and rate change for the ERP-OFDM frame format follows 17.3.7.

### 19.3.3.4 Long & short DSSS-OFDM PLCP format

The scrambler of 18.2.4 is used to scramble the DSSS-OFDM PLCP header and the scrambler in 17.3.5.4 is used to scramble the data symbols in the OFDM segment

#### 19.3.3.4.1 Overview of the DSSS-OFDM PLCP PSDU encoding process

This subclause contains the definitions and procedure for forming the PSDU portion of the DSSS-OFDM PLCP. Figure 19.3.3.4.1 shows an expanded view of the DSSS-OFDM PSDU. The PSDU is composed of four major sections. The first is the long sync training sequence that is used for acquisition of receiver parameters by the OFDM demodulator. The long sync training sequence for DSSS-OFDM is identical to the long training symbols described in 17.3.3. The second section is the OFDM SIGNAL field that provides the demodulator information on the OFDM data rate and length of the OFDM data section. The SIGNAL field for DSSS-OFDM is identical to the SIGNAL field described in 17.3.4. Following the SIGNAL field is the data section of the PSDU. This is identical to the modulation procedure described in 17.3.2.1 in steps (C) through (M). Following the data section, the PSDU for DSSS-OFDM appends a signal extension section to provide additional processing time for the OFDM demodulator. This signal extension is a period of no transmission as described in 19.3.3.4.5.

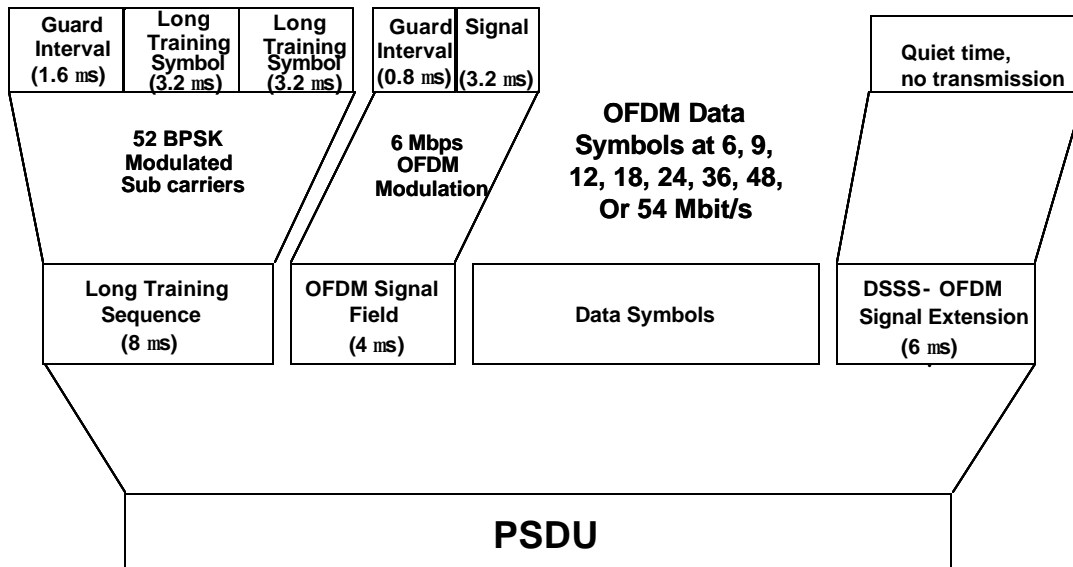


Figure 19.3.3.4.1 DSSS-OFDM PSDU

#### 19.3.3.4.2 Long sync training sequence definition

The Long Sync Training Sequence is defined in 17.3.3.

#### 19.3.3.4.3 OFDM signal field definition

The DSSS-OFDM Signal Field is defined in 17.3.4. Note that the length conveyed by the SIGNAL field is calculated as described in 17.3.4. That is, the length conveyed by this field does not include the signal extension described in 19.3.3.4.5.

#### 19.3.3.4.4 Data symbol definition

The same process as Steps C through M of 17.3.2.1 is used to encode the data symbols portion of the DSSS-OFDM PSDU.

#### 19.3.3.4.5 DSSS-OFDM signal extension

The DSSS-OFDM Signal Extension shall be a period of no transmission of 6  $\mu$ s length. It is inserted to allow more time to finish the convolutional decoding of the OFDM segment waveform and still meet the 10  $\mu$ s SIFS requirement of the ERP.

#### 19.3.4 PLCP transmit procedure

The transmit procedure will depend on the data rate and modulation format requested. For data rates of 1, 2, 5.5, 11, 22 and 33 Mbit/s, the PLCP transmit procedure shall follow 18.2.5. For the ERP\_OFDM rates of 6, 12, 24 and the rates of 9, 18, 36, 48, and 54 Mbit/s, the PLCP transmit procedure shall follow 17.3.11.

The transmit procedures for the optional DSSS-OFDM mode using the long or short PLCP preamble and header are the same as those described in 18.2.5, and do not change apart from the ability to transmit a higher rate PSDU using DSSS-OFDM.

#### 19.3.5 CCA

The PLCP shall provide the capability to perform a clear channel assessment (CCA) and report the results of the assessment to the MAC. The CCA mechanism shall detect a “medium busy” condition for all supported preamble and header types. That is, the CCA mechanism shall detect that the medium is busy for the PLCP PPDU specified in 17.3.3 and 18.2.2. The CCA mechanism performance requirements are given in 19.4.6.

The ERP shall provide the capability to perform CCA according to the following method:

**CCA Mode (ED\_and\_CS):** A combination of carrier sense (CS) and energy above threshold. CCA shall have a mechanism for carrier sense that will detect all mandatory clause 19 sync symbols. This CCA's mode's carrier sense shall include both Barker code sync detection and OFDM sync symbol detection. CCA shall report busy at least while a PPDU with energy above the ED threshold is being received at the antenna.

The energy detection status shall be given by the PMD primitive, PMD\_ED. The carrier sense status shall be given by PMD\_CS. The status of PMD\_ED and PMD\_CS is used in the PLCP convergence procedure to indicate activity to the MAC through the PHY interface primitive, PHY-CCA.indicate. A busy channel shall be indicated by PHY-CCA.indicate of class BUSY. A clear channel shall be indicated by PHY-CCA.indicate of class IDLE.

#### 19.3.6 PLCP receive procedure

This describes the procedure used by receivers of the ERP. An ERP receiver shall be capable of receiving 1, 2, 5.5, and 11 Mbit/s PLCPs using either the long or short preamble formats described in clause 18 and shall be capable of receiving 6, 12, and 24 Mbit/s using the modulation and preamble described in clause 17. The PHY may also implement the ERP-PBCC modulation at rates of 5.5, 11, 22, and 33 Mbit/s, the ERP-OFDM modulations at rates of 9, 18, 36, 48, and 54 Mbit/s, and/or the DSSS-OFDM modulation rates of 6, 9, 12, 18, 24, 36, 48, and 54 Mbit/s. The receiver shall be capable of detecting the preamble type (ERP-OFDM, Short Preamble, or Long Preamble) and the modulation type. These values shall be reported in the RXVECTOR (see 19.2).

Upon the receipt of a PPDU, the receiver shall first distinguish between the ERP-OFDM preamble and the single carrier modulations (long or short preamble). In the case where the preamble is an ERP-OFDM preamble, the PLCP Receive Procedure shall follow the procedure described in 17.3.12. Otherwise, the receiver shall then distinguish between the long preamble and short preamble as specified in 18.2.2. The receiver shall then demodulate the SERVICE field to determine the modulation type as specified in 19.3.2.1 or 19.3.2.2. For short preamble and long preamble using ERP-DSSS, ERP-CCK, or ERP-PBCC modulations, the receiver shall then follow the receive procedure described in 18.2.6.

A receiver that supports DSSS-OFDM is capable of receiving all rates specified in clause 15, and all mandatory rates in clauses 17 and 18. If the SIGNAL field indicates 3 Mbit/s, the receiver shall attempt to receive a DSSS-OFDM packet. The remaining receive procedures for a DSSS-OFDM capable receiver are the same as those described in 18.2.6, and do not change apart from the ability to receive DSSS-OFDM in the PSDU. If DSSS-OFDM

is being received, the receiver shall handle the modulation transition requirements as described in 19.7.2. The receiver shall then follow the receive procedure described in 17.3.12.

## 19.4 ERP PMD operating specifications (general)

Subclauses 19.4.1 through 19.4.7 provide general specifications for the ERP PMD sublayers. These specifications are based on 17.3.8 except where noted.

### 19.4.1 Regulatory requirements

All systems shall comply with the local regulatory requirements for operation in the 2.4 GHz band. For the USA, refer to FCC 15.247, 15.249, 15.205, and 15.209. For Europe, refer to ETS 300-328. For Japan, refer to MPHPT article 49-20.

### 19.4.2 Operating channel frequencies

The Extended Rate PHY shall operate in the frequency ranges specified 18.4.6.2, as allocated by regulatory bodies in the USA, Europe, and Japan. OFDM operation in channel 14 may not be allowed in Japan. The channel numbering and the number of operating channels shall follow Table 105 of 18.4.6.2.

### 19.4.3 Transmit and receive in-band and out-of-band spurious emissions

The Extended Rate PHY shall conform to in-band and out-of-band spurious emissions as set by the appropriate regulatory bodies for the 2.4 GHz band.

### 19.4.4 Slot time

The slot time is 20  $\mu$ s, except that an optional 9  $\mu$ s slot time may be used when the BSS consists of only ERP STAs capable of supporting this option. The optional 9  $\mu$ s slot time shall not be used if the network has one or more non-ERP STAs associated. For IBSS, the Short Slot Time subfield shall be set to 0, corresponding to a 20  $\mu$ s slot time.

### 19.4.5 SIFS value

The ERP shall use a SIFS of 10  $\mu$ s.

### 19.4.6 CCA performance

The CCA shall indicate TRUE if there is no CCA “medium busy” indication. The CCA parameters are subject to the following criteria:

- a) When a valid signal with a signal power of  $-76$  dBm or greater at the receiver antenna connector is present at the start of the PHY slot, the receiver’s CCA indicator shall report the channel busy with probability CCA\_Detect\_Probability within a CCA\_Time. CCA\_Time is SlotTime – RxTxTurnaroundTime. CCA\_Detect\_Probability is the probability that the CCA does respond correctly to a valid signal. The values for these parameters are found in Table 19.4.6. Note that the CCA Detect Probability and the power level are performance requirements.
- b) In the event that a correct PLCP header is received, the ERP PHY shall hold the CCA signal inactive (channel busy) for the full duration, as indicated by the PLCP LENGTH field. Should a loss of carrier sense occur in the middle of reception, the CCA shall indicate a busy medium for the intended duration of the transmitted PPDU.

**Table 19.4.6 CCA parameters**

Parameter	Slot Time = 20 ms	Slot Time = 9 ms
SlotTime	20 ms	9 ms

<b>RxTxTurnaroundTime</b>	<b>5 ms</b>	<b>5 ms</b>
<b>CCA_Time</b>	<b>15 ms</b>	<b>4 ms</b>
<b>CCA_Detect_Probability</b>	<b>&gt; 99%</b>	<b>&gt; 90%</b>

## 19.4.7 PMD transmit specifications

The PMD transmit specifications shall follow 17.3.9 with the exception of the transmit power level (17.3.9.1), the transmit center frequency tolerance (17.3.9.4), and the symbol clock frequency tolerance (17.3.9.5). Regulatory requirements may have an effect on the combination of maximum transmit power and spectral mask if the resulting signals violate restricted band emission limits.

### 19.4.7.1 Transmit power levels

The maximum transmit power level shall meet the requirements of the local regulatory body. For examples, see Table 115 in 18.4.7.1.

### 19.4.7.2 Transmit center frequency tolerance

The transmit center frequency tolerance shall be  $\pm 25$  PPM maximum. The transmit center frequency and symbol clock frequency shall be derived from the same reference oscillator (locked).

### 19.4.7.3 Symbol clock frequency tolerance

The symbol clock frequency tolerance shall be  $\pm 25$  PPM maximum. The transmit center frequency and symbol clock frequency shall be derived from the same reference oscillator (locked oscillators). This means that the error in PPM for the carrier and the symbol timing shall be the same.

## 19.5 ERP operation specifications

This subclause describes the receive specifications for the PMD sublayer. The receive specification for the ERP-OFDM modes shall follow 17.3.10 with the exception of the receiver maximum input level (17.3.10.4) and the adjacent channel rejection (17.3.10.2). The receive specifications for the ERP-DSSS modes shall follow 18.4.8 with the exception of the receiver maximum input level (18.4.8.2).

### 19.5.1 Receiver minimum input level sensitivity

The packet error rate (PER) of the ERP-OFDM modes shall be less than 10% at a PSDU length of 1000 bytes for the input levels of Table 91 of 17.3.10. Input levels are specific for each data rate and are measured at the antenna connector. A noise figure (NF) of 10 dB and an implementation loss of 5 dB are assumed. The PER of the ERP-DSSS modes shall be as specified in 18.4.8.1.

### 19.5.2 Adjacent channel rejection

Adjacent channels at 2.4 GHz are defined to be at  $\pm 25$  MHz spacing. The adjacent channel rejection shall be measured by setting the desired signal's strength 3 dB above the rate-dependent sensitivity specified in Table 91 of 17.3.10 and raising the power of the interfering signal until 10% PER is caused for a PSDU length of 1000 bytes. The power difference between the interfering and the desired channel is the corresponding adjacent channel rejection. The interfering signal in the adjacent channel shall be a conformant OFDM signal, unsynchronized with the signal in the channel under test. For an OFDM PHY the corresponding rejection shall be no less than specified in Table 91 of 17.3.10.

The alternate adjacent channel rejection of Table 91 shall not be required for the ERP.

The adjacent channel rejection of the ERP-DSSS modes shall follow 18.4.8.3.

### 19.5.3 Receive maximum input level capability

The PER shall be less than 10% at a PSDU length of 1000 bytes for an input level of  $-20$  dBm measured at the antenna connector for any supported modulation signal or data rate (i.e., 1, 2, 5.5, 6, 9, 11, 12, 18, 22, 24, 33, 36, 48, 54 Mbit/s).

### 19.5.4 Transmit spectral mask

The transmit spectral mask for the ERP-OFDM modes shall follow 17.3.9.2 and is shown in Figure 124 therein. The transmit spectral mask for the ERP-DSSS modes shall follow 18.4.7.3 and is shown in Figure 149 therein.

## 19.6 ERP-PBCC operation specifications

The ERP-PBCC receiver specifications shall follow 18.4.8 except as noted.

These optional modes provide systems the ability to achieve data rates of 22 and 33 Mbit/s in modes that are fully backwards compatible with clause 15 and clause 18 BSSs without requiring additional co-ordination or protection mechanisms. In addition, the 22 Mbit/s ERP-PBCC mode is spectrally identical to clause 18 BSSs. Four optional ERP-PBCC modulation formats and data rates are specified for the Enhanced Rate PHY (ERP). They shall be based on Packet Binary Convolutional Coding (PBCC) 5.5, 11, 22, and 33 Mbit/s modulations. The rates of 5.5 and 11 Mbit/s are described in 18.4.6.6.

### 19.6.1 Receiver minimum input level sensitivity

For the 22 Mbit/s ERP-PBCC mode, the frame error ratio shall be less than  $8 \times 10^{-2}$  at a PSDU length of 1024 octets for an input level of  $-76$  dBm measured at the antenna connector. For the 33 Mbit/s ERP-PBCC mode, the corresponding input level shall be  $-74$  dBm.

### 19.6.2 Receiver adjacent channel rejection

The adjacent channel rejection shall be equal to or better than 35 dB, with an FER of  $8 \times 10^{-2}$  using ERP-PBCC modulation and a PSDU length of 1024 octets. The adjacent channel rejection shall be measured using the following method. Input an ERP-PBCC modulated signal of the same rate at a level 6 dB greater than specified in 19.6.1. In an adjacent channel (25 MHz separation as defined by the channel numbering), input a signal modulated in a similar fashion, which adheres to the transmit mask specified in 18.4.7.3, to a level 41 dB above the level specified in 19.6.1. The adjacent channel signal shall be derived from a separate signal source. It shall not be a frequency-shifted version of the reference channel. Under these conditions, the FER shall be no worse than  $8 \times 10^{-2}$ .

## 19.7 DSSS-OFDM operation specifications

This optional mode provides systems the ability to use OFDM in a mode that is fully compatible with clause 15 and 18 BSSs without requiring additional coordination. That is, it does not need a protection mechanism. This compatibility requires the use of clause 18 long and short preambles and inclusion of a signal extension field to match SIFS spacing of clause 18 systems. By re-using the clause 18 preambles, this optional mode ensures that the clause 18 clear channel assessment (CCA) and short inter-frame spacing interval (SIFS) function properly when ERP and NonERP STAs interoperate. When this option is enabled, the same rates shall be supported in both ERP-OFDM and DSSS-OFDM. The DSSS-OFDM PMD transmit and receive specifications shall follow the related ERP-OFDM specifications in 19.5.

### 19.7.1 Overview

This optional extension of the DSSS system builds on the payload data rates of 1, 2, 5.5, and 11 Mbit/s, as described in Clause 18, to provide 6, 9, 12, 18, 24, 36, 48, and 54 Mbit/s payload data rates while re-using the preambles (short and long) described by clause 18. The capability described in this subclause is called Direct Sequence Spread Spectrum- Orthogonal Frequency Division Multiplexing (DSSS-OFDM). This optional capability complements the Extended Rate OFDM mode described in clause 19 by combining OFDM modulation with DSSS preambles. As a

result, for DSSS-OFDM, the PPDU format described in 18.2.2 is relatively unchanged. The major change is to the format of the PSDU. The clause 18 single carrier PSDU is replaced by a PSDU that is very similar to the PSDUs described in clause 17. This subclause highlights the differences. In addition, 19.7.2 specifies the radio and physical layer behavior of the transition from the Barker symbol modulated preamble and the OFDM modulated data for PSDU.

19.7.2 Single-carrier to multi-carrier transition requirements

The spectrum mask for the DSSS-OFDM waveform shall meet the requirements as shown in Figure 124 of 17.3.9.6.2.

The single-carrier signal segment of the packet shall have a coherent relationship with the multi-carrier (OFDM) segment of the packet. All characteristics of the signal shall be transferable from one symbol to the next, even when transitioning to the OFDM segment. This enables high-performance, coherent receiver operation across the whole packet. This requirement is no different in nature than that stated in clauses 15, 17, and 18. The distinction being, that those clauses use a signaling scheme that is either just single-carrier or just multi-carrier. In contrast, for this mode, both single-carrier and multi-carrier signaling are used within the context of a single packet.

This section specifies the coherent relationship between the single-carrier segment and the OFDM segment, so that the receiver has the opportunity to track through the transition without any forced parameter reacquisition. The single-carrier preamble and header provide all parametric information required for demodulation of the OFDM segment to within conventional estimation-in-noise accuracy. While multi-carrier sync features are provided for convenience at OFDM segment onset, if and how to use the multi-carrier sync for reacquisition is an implementer's decision. Multi-carrier sync is not necessary. The packet is coherent throughout.

As shown in Figure 19.7.2, the ideal transition would provide a constant carrier frequency and phase, a constant power, a constant spectrum and a constant timing relationship. Constant in this context means that the same clock crystal that sets the frequencies and timing of each part is the same through the transition. This allows the frequency and timing tracking loops to work undisturbed through the transition. The following subparagraphs establish the ideal transition characteristics for the transmit signal. An additional paragraph specifies the required implementation fidelity or accuracy.

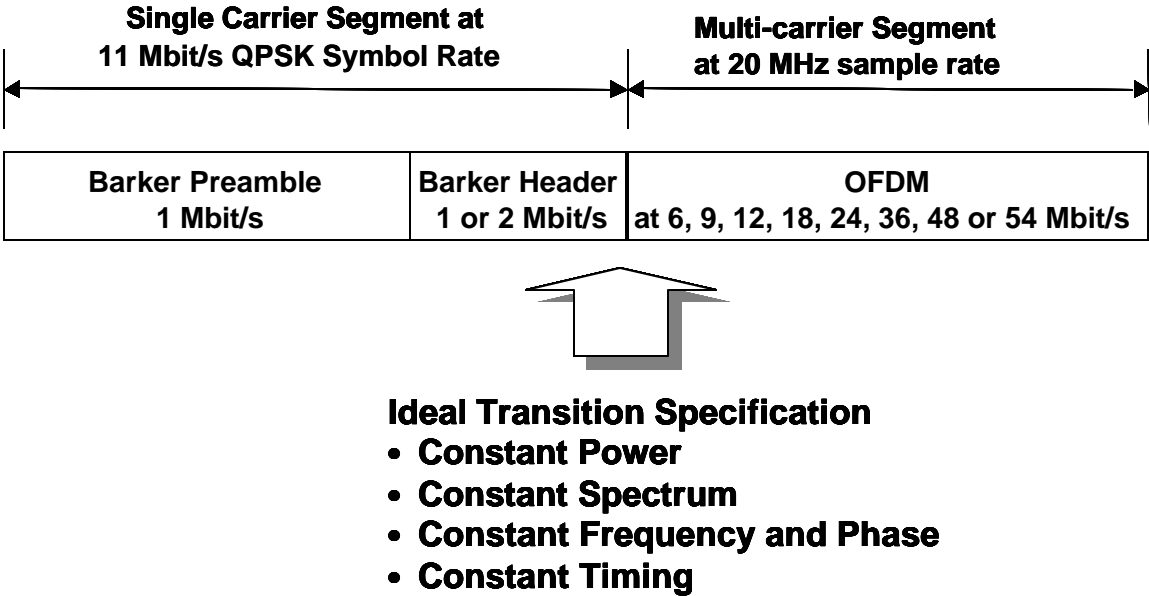


Figure 19.7.2 Single-carrier to multi-carrier transition definition.

### 19.7.2.1 Spectral binding requirement

The spectral binding requirement allows the receiver's estimate of the channel state information to be transferred from the single-carrier packet segment to the multi-carrier packet segment. This requirement establishes a coherent relationship between the end-to-end frequency responses of the single-carrier and multi-carrier segments.

During reception of the single-carrier preamble-and-header, the receiver may estimate the channel impulse response. In practice, this could be accomplished through Barker-code correlation. The channel impulse response contains end-to-end frequency response information about the linear distortion experienced by the signal due to filters and multipath. This distortion can be mitigated with an equalizer or other commonly known techniques.


The channel impulse response estimate generated during the single-carrier packet segment will include the single-carrier's pulse-shaping-filter frequency response used to control the single-carrier's transmit spectrum and transmit impulse response. The single-carrier's pulse-shaping filter may be distinct from the shaping technique used for the multi-carrier segment.

The spectral binding requirement states that the linear distortions experienced by the single-carrier signal and the linear distortions experienced by the multi-carrier signal have a known relationship. This relationship is defined by this specification and shall be manifested by all compliant transmit radios. This will allow any receiver to exploit channel information derived during the single-carrier segment and reuse the channel information during the multi-carrier segment, if desired.

Three elements have been itemized for this specification to achieve spectral binding. All three elements are necessary to achieve spectral binding, and they are discussed in the next three subclauses. The first element focuses on distortions common to both the single-carrier packet segment and the multi-carrier packet segment. The second element deals with pulse shaping unique to the OFDM packet segment. The third element deals with pulse shaping unique to the single-carrier packet segment. The multi-carrier pulse shape discussion precedes the single-carrier's pulse shape discussion because it is believed this will be a more comfortable progression, due to similar multi-carrier pulse shaping considerations contained in clause 17.

#### 19.7.2.1.1 Common linear distortions

Separate from the single-carrier and the multi-carrier pulse shaping, transmit signal generation will be designed to provide linear distortion continuity to the receiver's demodulation algorithms. The common linear distortion requirement is illustrated in Figure 19.7.2.1.1, where it is shown that the processing at the receiver assumes that the dominant linear distortions are induced on all waveform segments. The receiver observes the composite linear distortion due to imperfect transmit radio filters, due to multipath filtering, and due to imperfect receive radio filters. In general, the receiver is unable to decompose the distortion into separate physical components and is only able to observe the aggregate effect. This specification constrains only the linear distortions in the transmit radio, because that is what is necessary to ensure interoperability. The soft switch that appears in Figure 19.7.2.1.1 is a conceptual element to implement the transition, as described below.

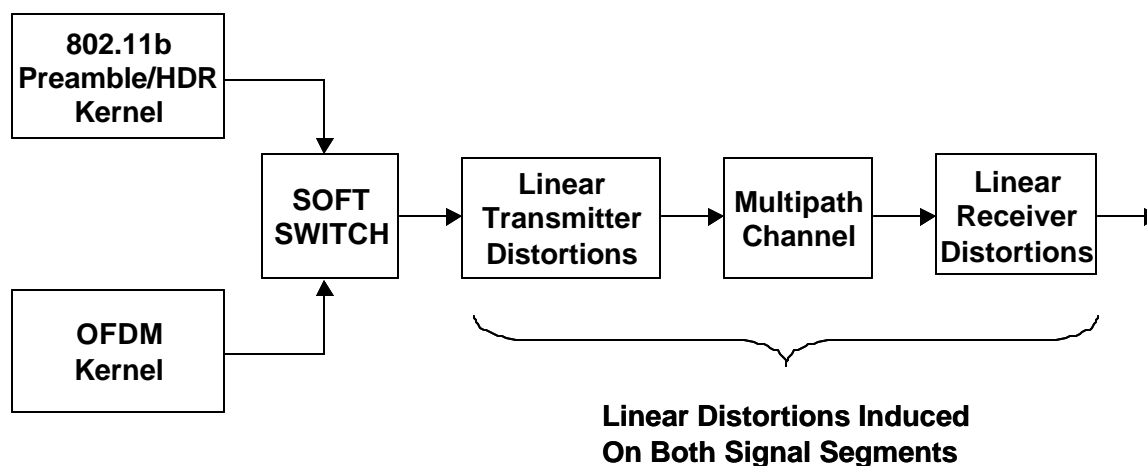

**Figure 19.7.2.1.1 Linear distortions common to the single-carrier and multi-carrier signal segments.**

In short, this common linear distortion requirement states that the dominant filters in the transmit radio will stay invariant and common to all waveform segments. Once the receiver has determined the end-to-end impulse response, channel information is assumed to be common to both the single-carrier signal and the multi-carrier signal. This will enable receiver design of linear-distortion mitigation techniques that do not require a reacquisition after transitioning to OFDM.

#### 19.7.2.1.2 Symbol shaping unique to the DSSS-OFDM segment

OFDM spectral shaping may be achieved using two mechanisms. One, time-domain convolution filtering may be used to shape the spectrum. Two, time-domain window tapering of OFDM symbol onset and termination may be used to shape the spectrum. This second mechanism can be viewed as frequency domain convolution. The first mechanism shall be common to both the OFDM and single-carrier if it is a dominant distortion mechanism. The second mechanism may be unique to the OFDM segment, because it does not affect the frequency response of the 52 sub-carriers.

The first spectral shaping mechanism using time-domain convolution filtering shall be common to both the single-carrier and multi-carrier segments for the reasons described in the preceding section. The receiver should not see intra-packet frequency response discontinuities.

Convolution filtering may be budgeted in various ways. One option would be to use a single filter that both the single-carrier and multi-carrier segments use. Another option would be to use two different physical filter realizations, one for the single-carrier segment and a second for the multi-carrier segment, say for reason of distinct sample rates or bit precision. With this second implementation option, the designer shall ensure the frequency response of the filter is common to both packet segments.

The second shaping mechanism, which uses frequency-domain convolution through time-domain sub-carrier onset-and-termination shaping, may be unique to the OFDM segment. This unique technique is acceptable because it does not modify the required frequency response of the 52 sub-carriers.

Spectral shaping by tapering the OFDM symbol onset-and-termination using a time-domain window is described in the clause 17 and is equally germane to clause 19 systems. For convenience, one of the relevant figures from clause 17 is repeated here as Figure 19.7.2.1.2-1. The clause 17 suggested tapering transition duration is 0.1  $\mu$ s.

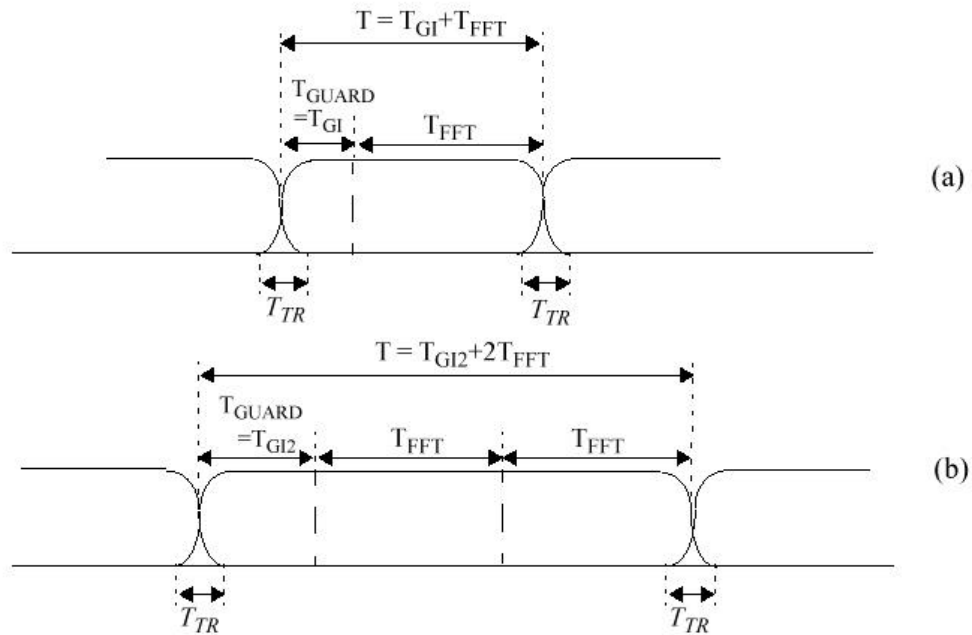


Figure 19.7.2.1.2-1 Spectral shaping achieved by OFDM symbol onset and termination shaping.

The effect of time-domain windowing on a single sub-carrier's power spectrum is shown in Figure 19.7.2.1.2 -2 for two cases. The first case is rectangular time-domain windowing of an OFDM symbol. The second case is for the clause 17 suggested time-domain windowing of an OFDM symbol with a  $0.1 \mu\text{s}$  transition. Note the difference in frequency dependent amplitude roll-off. Adding the 52 frequency-bin-centered individual sub-carrier power spectral densities generates the composite 52 sub-carrier power-spectrum.

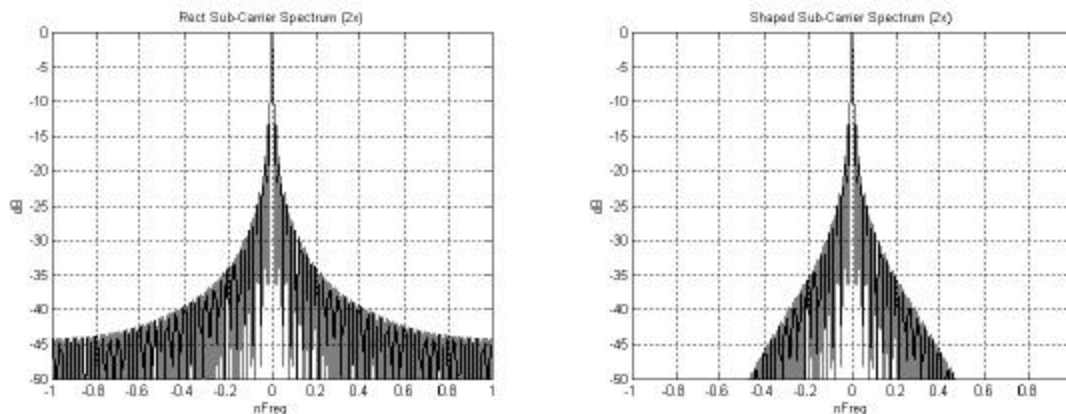


Figure 19.7.2.1.2-2 Sub-carrier spectra for rectangular windowing and clause 17 suggested windowing.

This type of OFDM spectrum control does not affect the relative amplitudes and phases of the individual sub-carriers. Instead it affects each sub-carrier's power spectral density. Consequently, this type of spectrum control has a benign effect on the relative spectrums of single-carrier and the multi-carrier packet segments. That is why it can be unique.

To achieve the design goal, the implementer may budget spectral shaping in the transmit radio. Some of the spectral shaping may be achieved using time-domain convolution filtering and some may be achieved through time-domain windowing of the OFDM. In any case the transmit implementation shall provide frequency response coherency.


### 19.7.2.1.3 Pulse shaping unique to the single carrier segment

This section describes the pulse shaping requirements of the single-carrier segment of the DSSS-OFDM packet. To establish frequency response coherency, it is necessary to specify the frequency response of the single-carrier signal that establishes a coherent relationship to the frequency response of the OFDM.

The frequency response of the single-carrier pulse is patterned after the tandem OFDM. The pattern is the OFDM signal as described in clause 17, with an example provided in Annex G. The ideal OFDM signal has a flat amplitude response and zero-phase offset across 52 sub-carriers. Clause 17 establishes the ideal frequency-response relationship between the 12 short SYNC sub-carriers, 52 long SYNC sub-carriers, the 52 SIGNAL field sub-carriers and the 52 data field sub-carriers. Similarly, the ideal relationship to the single-carrier frequency response is defined.

Relative to the ideal OFDM, the single-carrier part of the DSSS-OFDM signal shall have the pulse shape established herein. In a particular implementation, it is acceptable to deviate from this ideal but only in a manner that is common to both the single-carrier signal and the multi-carrier signal across the passband of the OFDM signal. This provides the required frequency response coherency.

The frequency response of the single-carrier pulse is patterned after the OFDM that will be transmitted in tandem. The single-carrier pulse is derived from a time-windowed sinc function as shown in Figure 19.7.2.1.3 -1. The sinc function is the time response of an ideal brick-wall filter. The brick-wall filter is set equal to the bandwidth of an ideal OFDM signal. In particular, the bandwidth of the brick-wall filter has been set to 52 times the clause 17 sub-carrier spacing of 20/64 MHz, or 312.5 KHz.

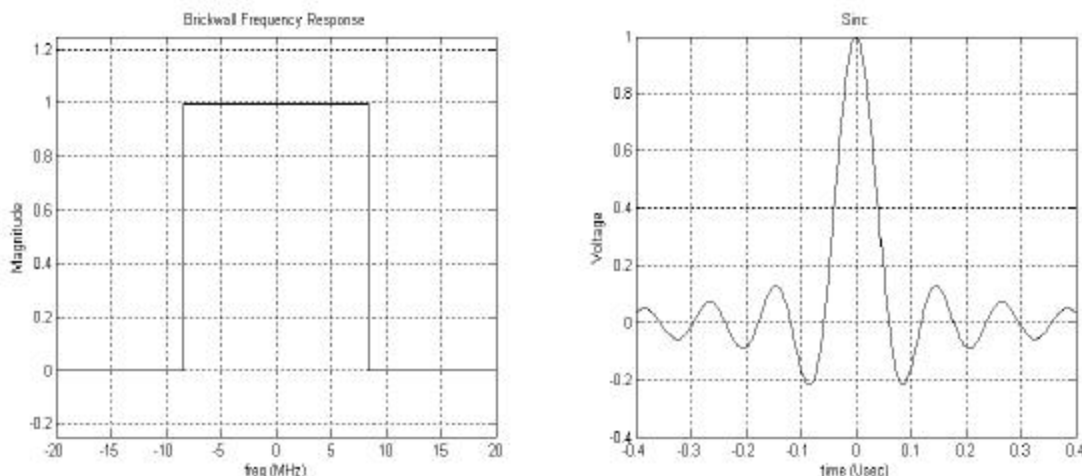

Equation 19.7.2.1.3 -1

$$h_{IdealBW}(t) = f_w \frac{\sin(p f_w t)}{p f_w t} = f_w \text{sinc}(f_w t) \quad , \quad \text{where } f_w = 52(20/64) \text{ MHz}$$

Figure 19.7.2.1.3-1 The foundational brickwall filter.

The infinite duration impulse response of the brickwall filter should be windowed to something practical. A continuous time version of the Hanning window may be used. The Hanning window and an overlay of the sinc function are shown in Figure 19.7.2.1.3 -2.

Equation 19.7.2.1.3 -2

$$h_{Window}(t) = 0.5 \left[ 1 + \cos \left( 2\pi \frac{t}{T_{SPAN}} \right) \right], \text{ where } T_{SPAN} = 0.8 \text{ usecs}$$

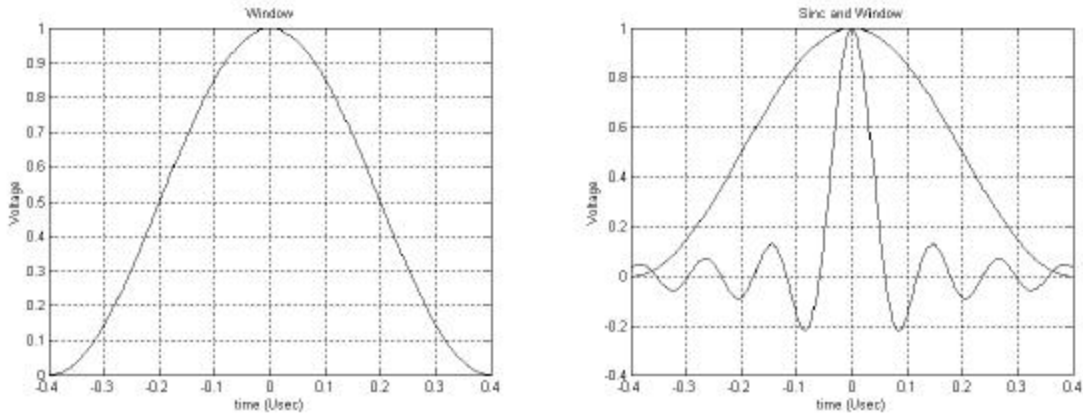


Figure 19.7.2.1.3-2 – The continuous time Hanning window.

The pulse specified for use with the single-carrier packet segment is obtained by application of the window as shown in Figure 19.7.2.1.3-3. Notice that its duration is equal to a clause 17 short sync cycle, only 0.8  $\mu$ s.

Equation 19.7.2.1.3 -3

$$p(t) = h_{Window}(t) h_{IdealBW}(t)$$

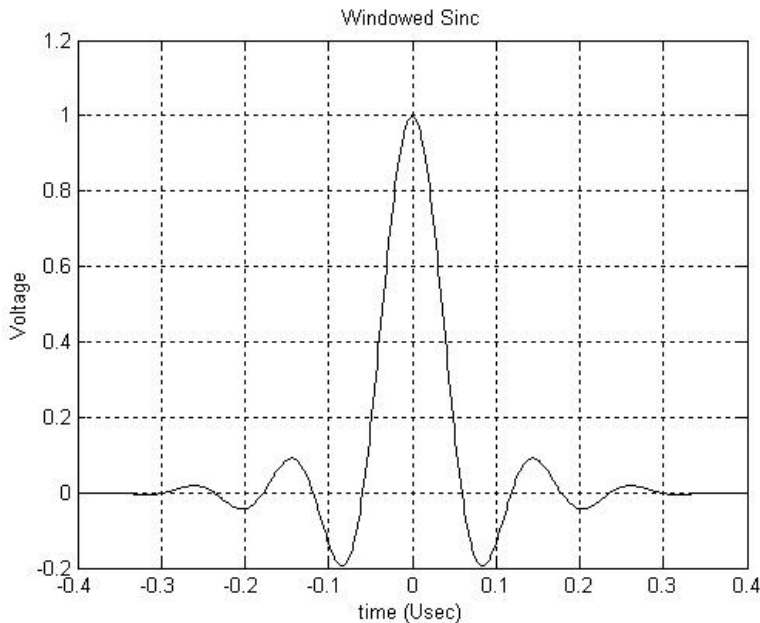


Figure 19.7.2.1.3-3 – The specified pulse

The frequency response of the derived pulse is shown in Figure 19.7.2.1.3-4. This pulse generates a single-carrier signal that has a spectrum nearly equal to that of the OFDM signal. This means that the receiver will experience

essentially no change in receive signal power behavior even in the presence of multipath. At the point of the outer most sub-carrier in the OFDM signal, the single-carrier spectrum is down only about 4 dB. This is deemed adequate because the single-carrier preamble-header is long in duration compared to the clause 17 sync duration. Plenty of time is available to generate channel impulse response information that is sufficiently accurate.

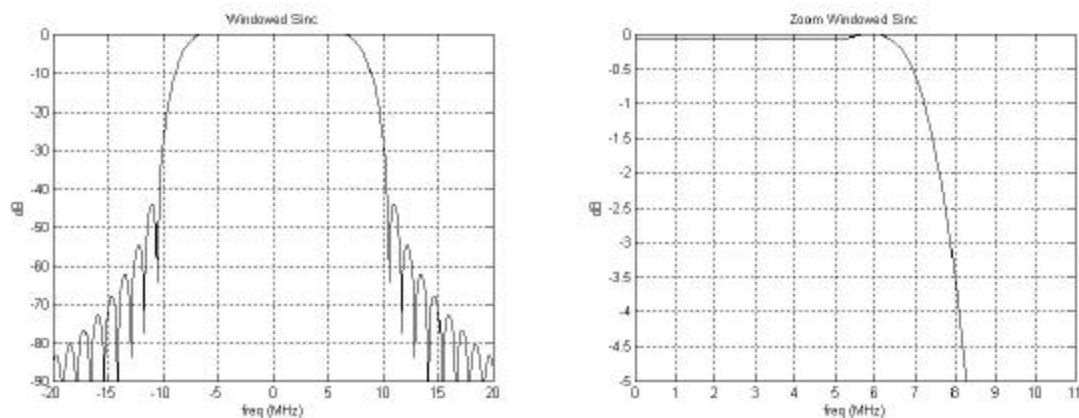


Figure 19.7.2.1.3-4 – The single-carrier frequency response.

In summary, the specified single-carrier pulse provides frequency response coherency between the single-carrier and multi-carrier segments of the packet. This does not mean that the spectrums are identical between segments. Rather, it means the ideal frequency responses of both are known. Beyond this, all linear distortion is common to both. It is not necessary to use this single-carrier pulse during clause 15 or clause 18 packet transmissions.

### 19.7.2.2 Sample-power matching requirement

The transmit signal power shall be equal for the single-carrier and multi-carrier signal segments. The point of comparison is shown in Figure 19.7.2.2. The power measurement will be over the single-carrier header and over the OFDM data symbols

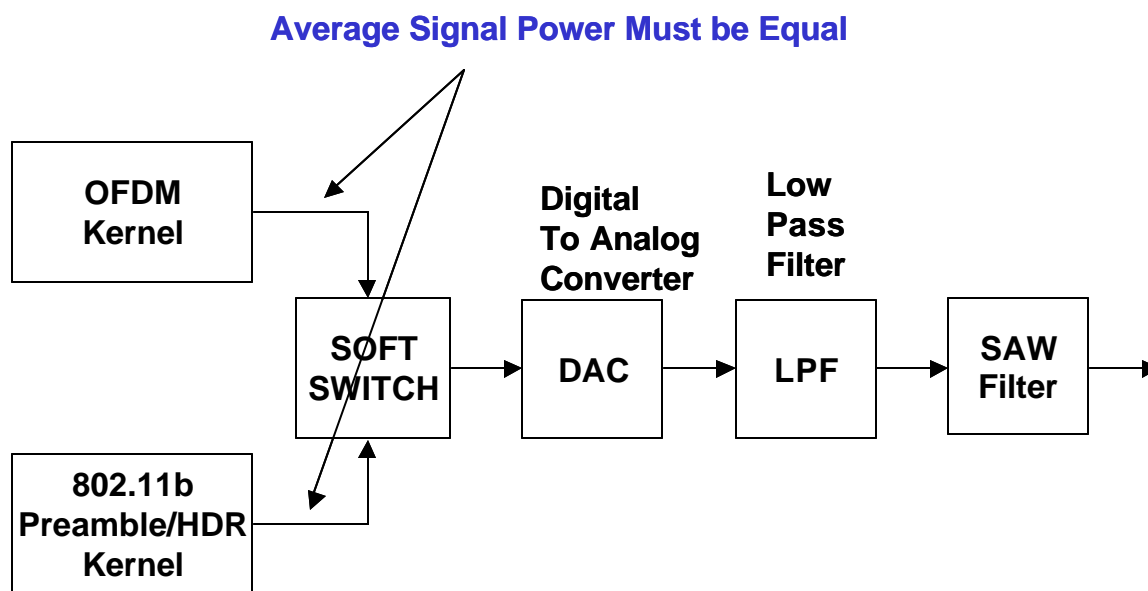


Figure 19.7.2.2 – Comparing signal power.

### 19.7.2.3 Transition time alignment

This section describes how the single-carrier signal and multi-carrier signal are time aligned. The single-carrier signal uses a chip rate of 11 MHz. The OFDM signal uses a fundamental sample rate of 20 MHz. The signals are easily aligned by first aligning the 11 MHz clock and the 20 MHz clock on 1  $\mu$ s boundaries as shown in Figure 19.7.2.3-1.

The 11 Barker chips of the preamble and header are transmitted aligned with this timing epoch. The first Barker chip is transmitted synchronous to the epoch, then the remaining 10 chips follow. This is repeated over the duration of the preamble and header.

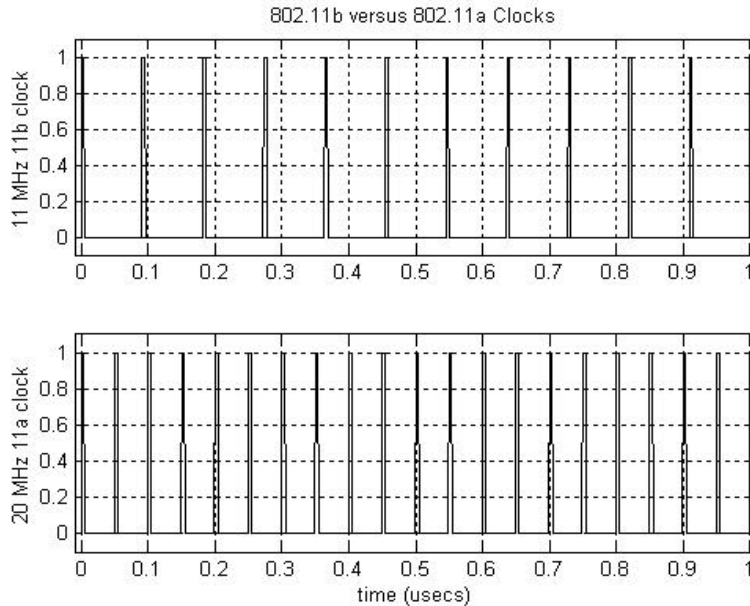


Figure 19.7.2.3-1 – Aligning the 11 MHz and 20 MHz clock.

The peak of the continuous-time single-carrier pulse shall be aligned to this epoch as shown in Figure 19.7.2.3-2.

The first full strength OFDM sample is sent on the 1  $\mu$ s-epoch boundary as illustrated in Figure 19.7.2.3-2.

Tapering may precede this. The peak corresponds to the first full-strength sample described in Annex G.

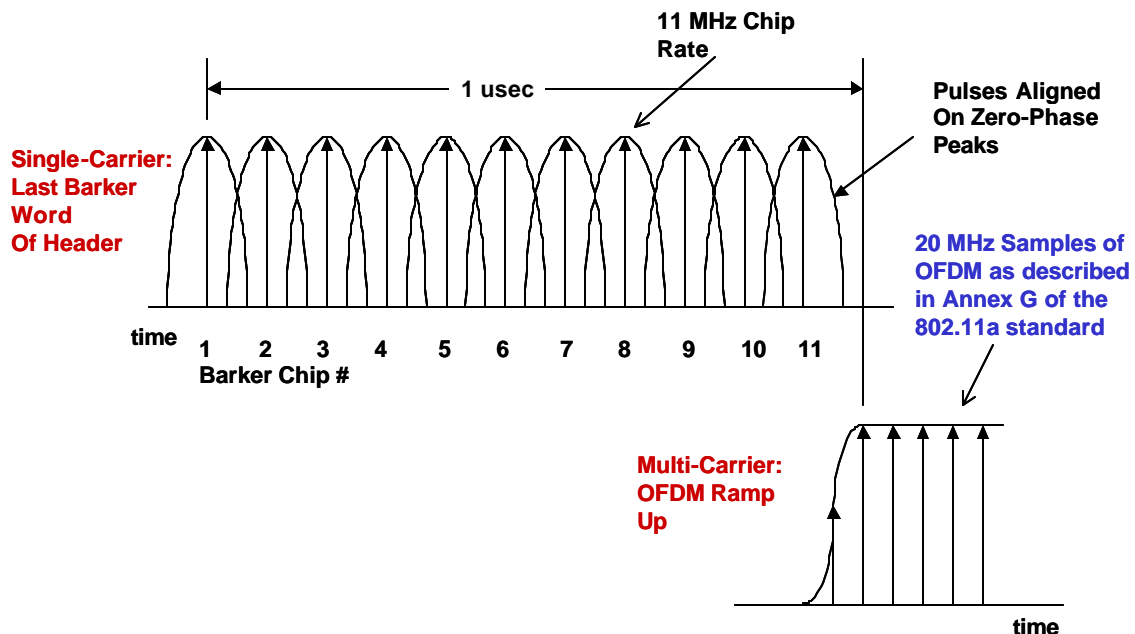


Figure 19.7.2.3-2 Single-carrier to OFDM time alignment.

#### 19.7.2.4 Single-carrier termination

The single carrier segment of a packet should terminate in nominally  $0.1\ \mu\text{s}$  with the same type shaping described for clause 17. This is depicted in Figure 19.7.2.4. It is not necessary to completely flush the single-carrier pulse-shaping filter. This minimizes the transition time overhead. This is informative as the basic requirement is to meet the spectral mask defined in 17.3.9.2.

This termination may be performed explicitly in the baseband processor or it may be provided by filters in the transmit radio.

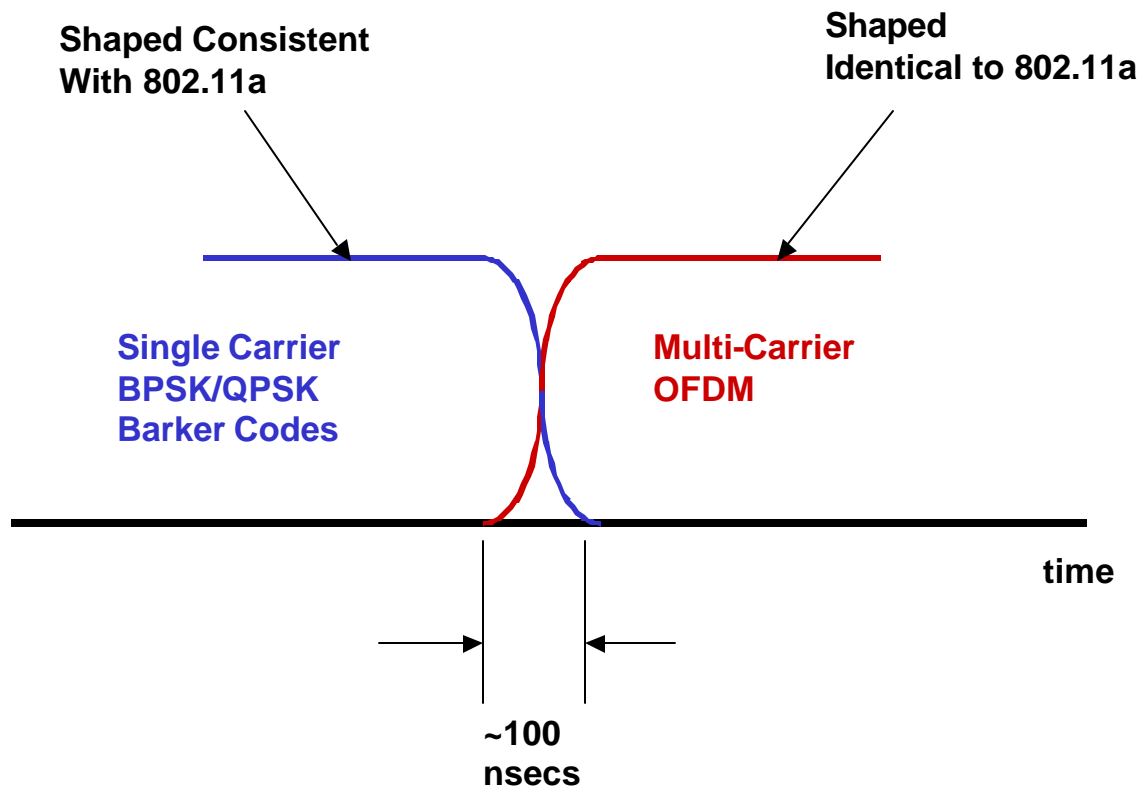


Figure 19.7.2.4 – Single-carrier termination requirement.

#### 19.7.2.5 Transition carrier frequency requirement

The carrier frequency shall be coherent across the packet segments. This effect is depicted in Figure 19.7.2.5.

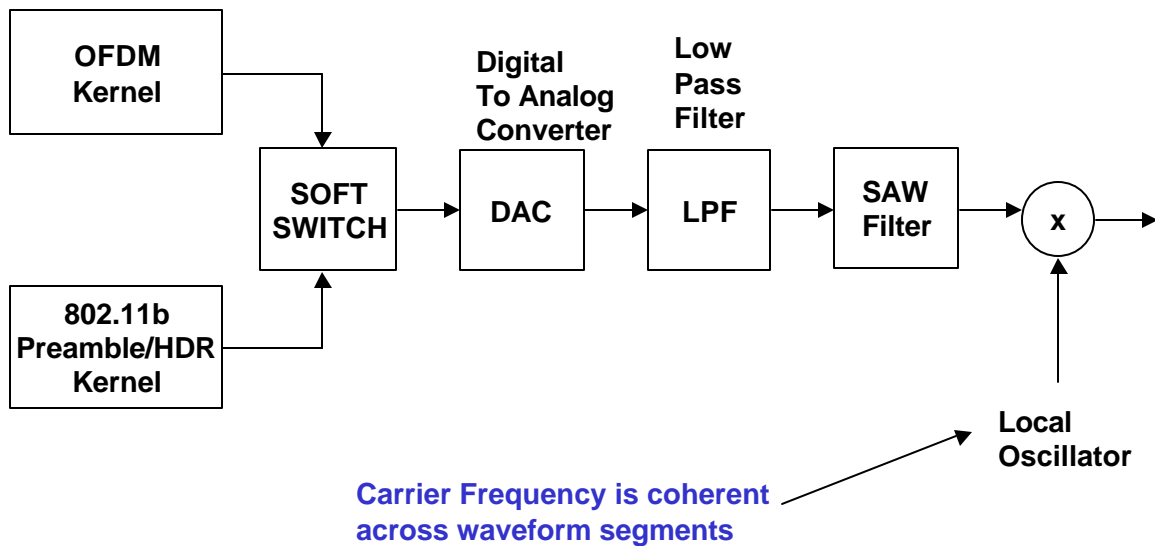


Figure 19.7.2.5 – Carrier frequency coherency shall be maintained.

### 19.7.2.6 Transition carrier phase requirement

The carrier phase shall be coherent across the single-carrier to multi-carrier transition. This coherency shall be differentially established relative to the phase of the last Barker symbol transmitted (the last 11 single-carrier chips). The OFDM segment symbols shall be transmitted with one of four phases relative to the phase of OFDM symbols as described in clause 17. These phases include: 0, 90, 180 or 270 degrees, depending upon the phase of the last Barker symbol. The phase of the first OFDM symbol (as referenced by the pilot tones) shall be 45 degrees more than the phase of the last Barker symbol. "More than" implies a clockwise rotation as shown in Figure 19.7.2.6-2.

In a transmit implementation using I/Q signaling, it is common to maximally energize in the I-and-Q channels concurrently for BPSK or QPSK signaling. The analog stages of the transmit radio tend to perform best with this configuration. To achieve this effect, typically the BPSK or QPSK I-and-Q alignment of the Barker symbols are at 45 degrees, 135 degrees, -135 degrees and -45 degrees as shown in Figure 19.7.2.6-1. This Barker symbol alignment is used to establish the phase of the OFDM signal.

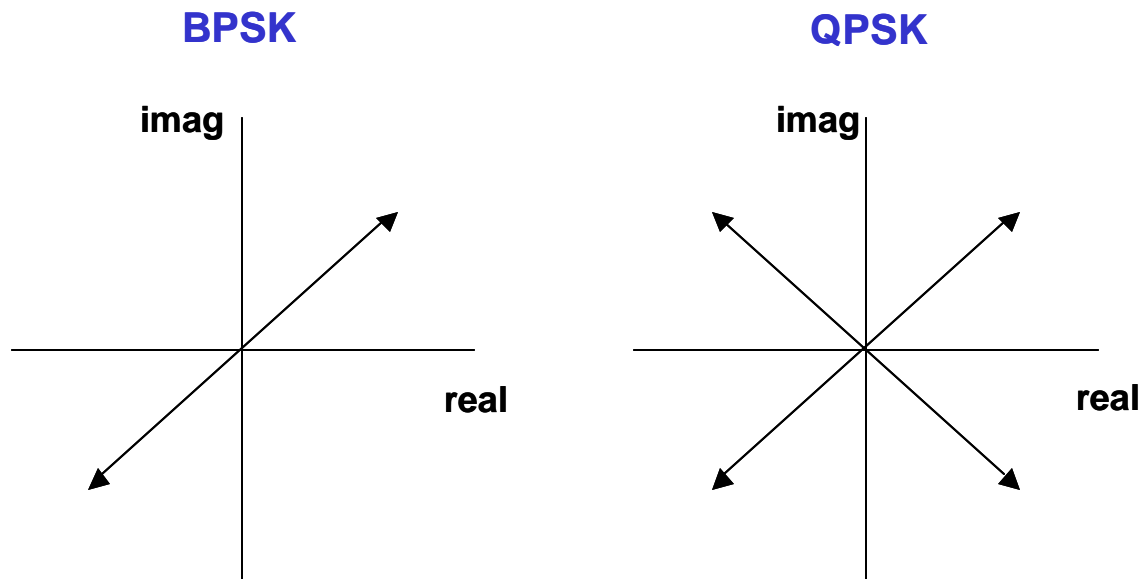


Figure 19.7.2.6-1 – BPSK and QPSK signaling with the I/Q channels maximally energized.

Figure 19.7.2.6-2 is a series of diagrams illustrating the phase relationship between the last Barker symbol (not the last chip) in the 802.11g header and subsequent OFDM symbols. For example, if the phase of the last Barker symbol is in the first quadrant at 45 degrees, then the phase of the OFDM symbols will be transmitted as described in Annex G unmodified. However, if the phase of the last Barker symbol is in the second quadrant (135 degree phase) then the phase of the OFDM symbols will be rotated by +90 degrees relative to the phase of the samples in Annex G. If the phase of the last Barker symbol is in the third quadrant (-135 degree phase) then the phase of the OFDM symbols will be rotated by +180 degrees relative to the phase of the samples in Annex G. If the phase of the last Barker symbol is in the fourth quadrant (-45 degree phase) then the phase of the OFDM symbols will be rotated by +270 degrees relative to the phase of the samples in Annex G.

If the transmitter generates the Barker symbols at some other angular relationship to the I/Q axes, then the OFDM symbols shall be transmitted at a phase 45 degrees more than the phase of the last 11-chip Barker symbol.

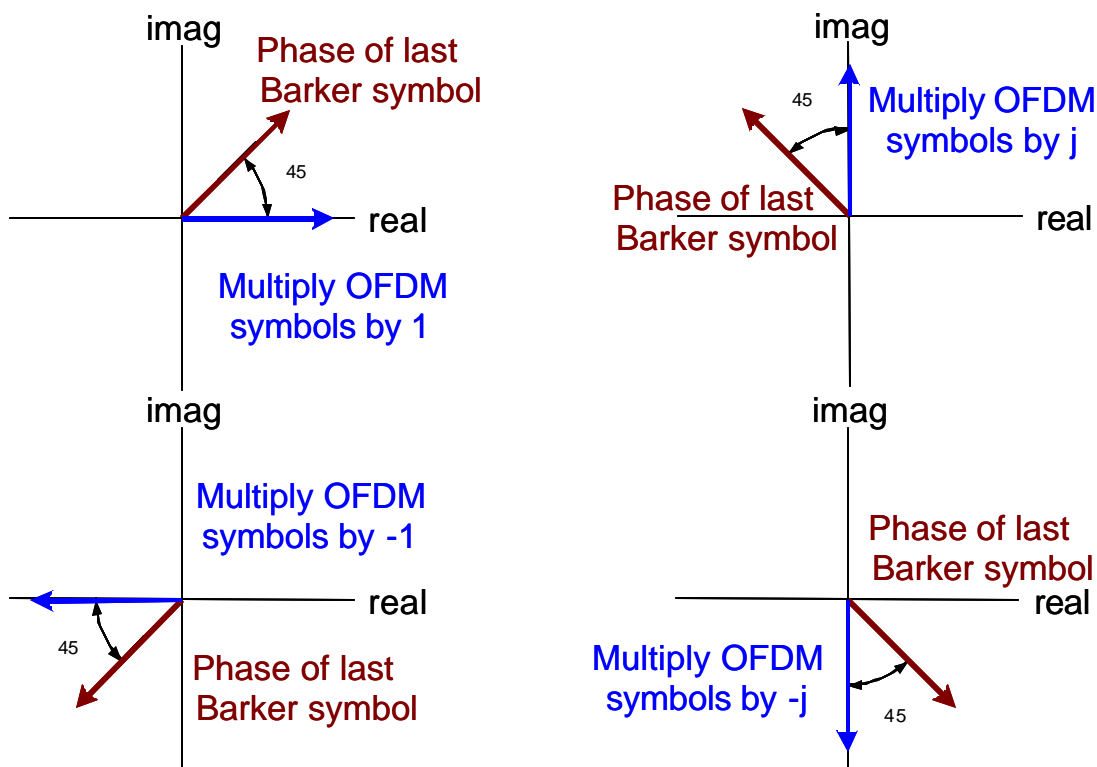


Figure 19.7.2.6-2 – The phase of the first OFDM segment symbol is established by the last Barker symbol.

### 19.7.2.7 Transmit modulation accuracy requirement

The preceding sections establish transmit modulation requirements without mention of required accuracy. The accuracy is as described in 17.3.9.7.

The required accuracy for a given transmit packet is data rate dependent. The packet accuracy is set by the data rate of the OFDM portion of the packet. The preamble and header will be transmitted with the same fidelity requirement as the fidelity requirement levied on the OFDM portion of the packet. For the single-carrier portion of the packet, the EVM is interpreted as normalized mean-squared error (NMSE).

## 19.8 ERP PLME

### 19.8.1 PLME SAP

Table 19.8 lists the additional MIB attributes that may be accessed by the PHY sublayer entities and the intralayer of higher layer management entities (LMEs). These attributes are accessed via the PLME-GET, PLME-SET, PLME-RESET, and PLME-CHARACTERISTICS primitives defined in 10.4.

**Table 19.8.1 MIB attribute default values/ranges**

Managed Object	Default Value / Range	Operational Semantics
<b>dot11 PHY Operation Table</b>		
dot11PHYtype	ERP (X'06')	Static
dot11CurrentRegDomain	Implementation dependent	Static
dot11TempType	Implementation dependent	Static
<b>dot11 PHY Antenna Table</b>		
dot11CurrentTxAntenna	Implementation dependent	Dynamic
dot11DiversitySupport	Implementation dependent	Static
dot11CurrentRxAntenna	Implementation dependent	Dynamic
<b>Dot11 PHY Tx Power Table</b>		
dot11NumberSupportedPowerLevels	Implementation dependent	Static
dot11TxPowerLevel1	Implementation dependent	Static
dot11TxPowerLevel2	Implementation dependent	Static
dot11TxPowerLevel3	Implementation dependent	Static
dot11TxPowerLevel4	Implementation dependent	Static
dot11TxPowerLevel5	Implementation dependent	Static
dot11TxPowerLevel6	Implementation dependent	Static
dot11TxPowerLevel7	Implementation dependent	Static
dot11TxPowerLevel8	Implementation dependent	Static
dot11CurrentTxPowerLevel	Implementation dependent	Dynamic
<b>dot11 Phy DSSS Table</b>		
dot11CurrentChannel	Implementation dependent	Dynamic
<b>dot11 Reg Domains Supported Table</b>		
dot11RegDomainsSupportedValue(s)	Implementation dependent	Static
<b>dot11 PHY Antennas List Table</b>		
dot11SupportedTxAntenna	Implementation dependent	Static
dot11SupportedRxAntenna	Implementation dependent	Static
dot11DiversitySelectionRx	Implementation dependent	Dynamic
<b>dot11 Supported Data Rates Tx Table</b>		
dot11SupportedDataRatesTxValue	X'02' = 1 Mbit/s X'04' = 2 Mbit/s X'0B' = 5.5 Mbit/s X'16' = 11 Mbit/s X'0C' = 6 Mbit/s X'12' = 9 Mbit/s X'18' = 12 Mbit/s X'24' = 18 Mbit/s X'2C' = 22 Mbit/s X'30' = 24 Mbit/s X'42' = 33 Mbit/s X'48' = 36 Mbit/s X'60' = 48 Mbit/s	Static

	X'6C' = 54 Mbit/s	
<b>dot11 Supported Data Rates Rx Table</b>		
dot11SupportedDataRatesRxValue	X'02' = 1 Mbit/s X'04' = 2 Mbit/s X'0B' = 5.5 Mbit/s X'16' = 11 Mbit/s X'0C' = 6 Mbit/s X'12' = 9 Mbit/s X'18' = 12 Mbit/s X'24' = 18 Mbit/s X'2C' = 22 Mbit/s X'30' = 24 Mbit/s X'42' = 33 Mbit/s X'48' = 36 Mbit/s X'60' = 48 Mbit/s X'6C' = 54 Mbit/s	Static
<b>dot11 HRDSSS PHY Table</b>		
dot11ShortPreambleOptionImplemented	True	Static
dot11PBCCOptionImplemented	Implementation dependent	Static
dot11ChannelAgilityPresent	Implementation dependent	Static
dot11ChannelAgilityEnabled	False/Boolean	Dynamic
<b>dot11 PHY ERP Table</b>		
dot11ERP-PBCCOptionImplemented	False/Boolean	Static
dot11DSSS-OFDMOptionImplemented	False/Boolean	Static
dot11DSSS-OFDMOptionEnabled	False/Boolean	Dynamic
dot11ShortSlotTimeOptionImplemented	False/Boolean	Static
dot11ShortSlotTimeOptionEnabled	False/Boolean	Dynamic

1  
 2  
 3  
 4  
 5 **19.8.2 MIB**

6  
 7 High Rate PHY MIB attributes are defined in Annex D with additions from this supplement, and with specific  
 8 values defined in Table 19.8.1  
 9

10 **19.8.3 TXTIME**

11  
 12 The value of TXTIME is calculated for each modulation type based on parameters in the TXVECTOR. For the 1, 2,  
 13 5.5, and 11 Mbit/s modes with DSSS, CCK and PBCC modulation formats, the value shall be calculated as  
 14 described in 18.3.4  
 15

16 **19.8.3.1 ERP-OFDM TXTIME calculations**

17  
 18 The value of the TXTIME parameter returned by the PLME-TXTIME.confirm primitive shall be calculated using  
 19 the ERP-OFDM TXTIME calculation as follows.

20  
 21 
$$\text{TXTIME} = T_{\text{PREAMBLE}} + T_{\text{SIGNAL}} + T_{\text{SYM}} \times \text{Ceiling}((16 + 8 \times \text{LENGTH} + 6)/N_{\text{DBPS}}) + \text{Signal Extension}$$

22  
 23 Where:

- $T_{\text{PREAMBLE}}$ ,  $T_{\text{SIGNAL}}$ , and  $T_{\text{SYM}}$  are defined in Table 79 “Timing Related Parameters” in 17.3.2.3.
- $N_{\text{DBPS}}$  is Number of Data Bits per Symbol and is derived from the DATARATE parameter in Table 78 “Rate Dependent Parameters” in 17.3.2.2.
- Ceiling is a function that returns the smallest integer value greater than or equal to its argument value.
- Signal Extension is 6  $\mu\text{s}$

### 19.8.3.2 ERP-PBCC TXTIME calculations

The value of the TXTIME parameter returned by the PLME-TXTIME.confirm primitive shall be calculated according to the following equation:

For PBCC 5.5 and 11 Mbit/s see 18.3.4

For ERP-PBCC-22 Mbit/s

$$\text{TXTIME} = \text{PreambleLength} + \text{PLCPHeaderTime} + \text{Ceiling}(((\text{LENGTH} + \text{PBCC}) \times 8) / \text{DATARATE})$$

For ERP-PBCC-33 Mbit/s

$$\text{TXTIME} = \text{PreambleLength} + \text{PLCPHeaderTime} + \dots \\ \text{Ceiling}(((\text{LENGTH} + \text{PBCC}) \times 8) / \text{DATARATE}) + \text{ClkSwitchTime}.$$

Where:

- LENGTH and DATARATE are values from the TXVECTOR parameter of the corresponding PLME-TXTIME request primitive.
- “PBCC” has a value of 1 if the SIGNAL value from the TXVECTOR parameter specifies ERP-PBCC and has a value of 0 otherwise.
- PreambleLength is 144  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “LONGPREAMBLE” or 72  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “SHORTPREAMBLE”.
- PLCPHeaderTime is 48  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “LONGPREAMBLE” or 24  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “SHORTPREAMBLE”.
- LENGTH is in units of octets.
- DATARATE is in units of Mbit/s.
- ClkSwitchTime is defined as 1  $\mu\text{s}$ .
- Ceiling is a function that returns the smallest integer value greater than or equal to its argument value.

### 19.8.3.3 DSSS-OFDM TXTIME calculations

The value of the TXTIME parameter returned by the PLME-TXTIME.confirm primitive shall be calculated according to the following equation:

$$\text{TXTIME} = \text{PreambleLengthDSSS} + \text{PLCPHeaderTimeDSSS} + \dots \\ \text{PreambleLengthOFDM} + \text{PLCPSignalOFDM} + \dots \\ 4 \times \text{Ceiling}((\text{PLCPServiceBits} + 8 \times (\text{NumberOfOctets}) + \text{PadBits}) / N_{\text{DBPS}}) + \text{SignalExtension}$$

Where

- PreambleLengthDSSS is 144  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “LONGPREAMBLE,” or 72  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “SHORTPREAMBLE”;
- PLCPHeaderTimeDSSS is 48  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “LONGPREAMBLE,” or 24  $\mu\text{s}$  if the PREAMBLE\_TYPE value from the TXVECTOR parameter indicates “SHORTPREAMBLE”;

- Ceiling is a function that returns the smallest integer value greater than or equal to its argument value;
- PreambleLengthOFDM is 8  $\mu$ s;
- PLCPSignalOFDM is 4  $\mu$ s;
- PLCPServiceBits is 16 bits;
- NumberOfOctets is the number of data octets in the PSDU;
- PadBits is 6 bits;
- SignalExtension is 6  $\mu$ s;
- $N_{DBPS}$  is the number of data bits per OFDM symbol.

## 19.8.4 ERP-OFDM PLCP PSDU definition

The DSSS PHY characteristics in Table 19.8.4 shall be used for the Extended Rate PHY for the purposes of MAC timing calculations.

The slot time shall be 20  $\mu$ s, unless the BSS consists only of ERP STAs that support the Short Slot Time option. STAs indicate support for a short slot time by setting the Short Slot Time subfield to 1 when transmitting Association Request and Reassociation Request MMPDUs. If the BSS consists of only ERP STAs that support the Short Slot Time option, an optional 9  $\mu$ s slot time may be used. APs indicate usage of a 9  $\mu$ s slot time by setting the Short Slot Time subfield to 1 in all Beacon, Probe Response, Association Response, and Reassociation MMPDU transmissions as described in 7.3.1.4. STAs shall use short slot if the BSS indicates short slot.

**Table 19.8.4—Extended rate PHY characteristics**

Characteristic	Value
aSlotTime	Long = 20 $\mu$ s, short = 9 $\mu$ s
aSIFSTime	10 $\mu$ s
aCCATime	<15 $\mu$ s for long slot time or <4 $\mu$ s for Short Slot Time, see 19.4.6
aRxTxTurnaroundTime	<5 $\mu$ s
aTxRxTurnaroundTime	<10 $\mu$ s
aTxPLCPDelay	Implementation dependent as long as the requirements of aRxTxTurnaroundTime are met.
aRxPLCPDelay	Implementation dependent as long as the requirements of aSIFSTime and aCCATime are met
aRxTxSwitchTime	<<1 $\mu$ s
aTxRampOnTime	Implementation dependent as long as the requirements of aRxTxTurnaroundTime are met
aTxRampOffTime	Implementation dependent as long as the requirements of aSIFSTime are met
ATxRFDelay	Implementation dependent as long as the requirements of aRxTxTurnaroundTime are met
ARxRFDelay	Implementation dependent as long as the requirements of aSIFSTime and aCCATime are met
aAirPropagationTime	<<1 $\mu$ s
aMACProcessingDelay	<2 $\mu$ s
aPreambleLength	20 $\mu$ s
aPLCPHeaderLength	4 $\mu$ s
aMPDUMaxLength	4095
aCWmin(0)	31
aCWmin(1)	15
ACWmin	The set aCWmin()
aCWmax	1023

## 19.9 Extended rate PMD sublayer

### 19.9.1 Scope and field of application

This subclause describes the PMD services provided to the PLCP for the ERP.

### 19.9.2 Overview of service

The ERP sublayer accepts PLCP sublayer service primitives and provides the actual means by which data is transmitted or received from the medium. The combined functions of the Extended Rate PMD sublayer primitives and parameters for the receive function result in a data stream, timing information, and associated received signal parameters being delivered to the PLCP sublayer. A similar functionality is provided for data transmission.

### 19.9.3 Overview of Interactions

The primitives associated with the PLCP sublayer to the ERP fall into two basic categories

- a) Service primitives that support PLCP peer-to-peer interactions;
- b) Service primitives that have local significance and that support sublayer-to-sublayer interactions.

### 19.9.4 Basic service and options

All of the service primitives described in this subclause are considered mandatory, unless otherwise specified.

#### 19.9.4.1 PMD\_SAP peer-to-peer service primitives

Table 19.9.4.1 indicates the primitives for peer-to-peer interactions.

**Table 19.9.4.1 PMD\_SAP peer-to-peer services**

Primitive	Request	Indicate	Confirm	Response
PMD_Data	X	X		

#### 19.9.4.2 PMD\_SAP sublayer-to-sublayer service primitives

Table 19.9.4.2 indicates the primitives for sublayer-to-sublayer interactions.

**Table 19.9.4.2 PMD\_SAP sublayer-to-sublayer services**

Primitive	Request	Indicate	Confirm	Response
PMD_TXSTART	X			
PMD_TXEND	X			
PMD_ANTSEL	X			
PMD_TXPWRLVL	X			
PMD_MODULATION	X			
PMD_PREAMBLE	X			
PMD_RATE	X			
PMD_RSSI		X		
PMD_SQ		X		
PMD_CS		X		
PMD_ED		X		

#### 19.9.4.3 PMD\_SAP service primitive parameters

Table 19.9.4.3 shows the parameters used by one or more of the PMD\_SAP service primitives.

Table 19.9.4.3 List of parameters for the PMD primitives

Parameter	Associated primitive	Value	Description
TXD_UNIT	PMD_DATA.request	0 to $(2^n)-1$ , where n is the number of bits per symbol for the modulation and rate specified in PMD_MODULATION.request and PMD_RATE.request primitives.	This parameter represents a single block of data, which, in turn, is used by the PMD to be encoded into a transmitted symbol.
RXD_UNIT	PMD_DATA.indicate	0 to $(2^n)-1$ , where n is the number of bits per symbol for the modulation and rate specified in PMD_MODULATION.request and PMD_RATE.request primitives.	This parameter represents a single symbol that has been demodulated by the PMD entity.
MODULATION	PMD_MODULATION.request	ERP-DSSS, ERP-CCK, PBCC, ERP-PBCC, ERP-OFDM, DSSS-OFDM	The MODULATION parameter specifies to the PMD layer, which ERP modulation format is for transmission of the PSDU portion of the PPDU.
PREAMBLE	PMD_PREAMBLE.request	0 for long 1 for short	PREAMBLE selects which of the ERP preamble types is used for PLCP transmission, when applicable. It is not applicable to ERP-OFDM format.
ANT_STATE	PMD_ANTSEL.request	1 to 256	ANT_STATE selects which of the available antennas is used for transmission. The number of available antennas is determined from the MIB table parameters.
TXPWR_LEVEL	PMD_TXPWRLVL.request	1-8 (max of 8 levels)	TXPWR_LEVEL selects which of the optional transmit power levels should be used for the current PPDU transmission. The number of available power levels is determined from the MIB table parameters.
RATE	PMD_RATE.request	X'0A' for 1 Mbit/s X'14' for 2 Mbit/s X'37' for 5.5 Mbit/s X'6E' for 11 Mbit/s  X'DC' for 22 Mbit/s X'21' for 33 Mbit/s  X'75' for 12 Mbit/s BPSK	RATE selects which of the ERP data rates is used for PSDU transmission. Note that the OFDM rates are the raw, uncoded rates as in 17.3.7 and 17.5.5 and represent the rates

		X'E7' for 24 Mbit/s QPSK X'4B' for 48 Mbit/s 16 QAM X'AA' for 72 Mbit/s 64QAM	existing at this interface.
RSSI	PMD_RSSI.indicate	8 bits of RSSI (256 levels)	The RSSI is a measure of the RF energy received. Mapping of the RSSI values to actual received power is implementation dependent. See 19.9.5.14.
SQ	PMD_SQ.indicate	8 bits of SQ	This parameter is a measure of the signal quality received by the ERP during the PLCP preamble and header. It is not applicable to ERP-OFDM format. See 19.9.5.15
CS	PMD_CS.indicate	0 for DISABLED 1 for ENABLED	The PMD_CS (preamble detect) primitive in conjunction with the PMD_ED provides the CCA status through the PLCP layer PHY-CCA primitive. PMD_CS indicates a binary status of ENABLED or DISABLED. PMD_CS is ENABLED upon detection of Barker code or OFDM sync signals. PMD_CS is DISABLED otherwise.
ED	PMD_ED.indicate	0 for DISABLED 1 for ENABLED	The PMD_ED (energy detect) primitive, along with the PMD_SQ, provides CCA status at the PLCP layer through the PHY-CCA primitive. PMD_ED indicates a binary status of ENABLED or DISABLED. PMD_ED is ENABLED when the RSSI indicated in the PMD_RSSI is greater than the detection threshold. PMD_ED is DISABLED otherwise.

## 19.9.5 PMD\_SAP detailed service specification

The following subclauses describe the services provided by each PMD primitive.

### 19.9.5.1 PMD\_DATA.request

This primitive is the same as that defined in 17.5.5.1 and 18.4.5.1 except that the parameter TXD\_UNIT is expanded in scope to reflect the supported modulation formats of ERP as defined in 19.9.4.3.

### 19.9.5.2 PMD\_DATA.indicate

This primitive is the same as that defined in 17.5.5.2 and 18.4.5.2 except that the parameter RXD\_UNIT is expanded in scope to reflect the supported modulation formats of ERP as defined in 19.9.4.3.

### 19.9.5.3 PMD\_MODULATION.request

This primitive is the same as that defined in 18.4.5.3 except that the parameter MODULATION is expanded in scope to reflect the supported modulation formats of ERP as defined in 19.9.4.3.

### 19.9.5.5 PMD\_PREAMBLE.request

This primitive is the same as that defined in 18.4.5.4, including the definition of the parameter PREAMBLE. This primitive is not used in association with transmission of ERP-OFDM modulations.

### 19.9.5.7 PMD\_TXSTART.request

This primitive is the same as that defined in 17.5.5.3 and 18.4.5.6.

### 19.9.5.8 PMD\_TXEND.request

This primitive is the same as that defined in 17.5.5.4 and 18.4.5.7.

### 19.9.5.9 PMD\_ANTSEL.request

This primitive is the same as that defined in 18.4.5.8, including the definition of the parameter ANT\_STATE.

### 19.9.5.11 PMD\_TXPRWLVL.request

This primitive is the same as that defined in 17.5.5.5, including the definition of the parameter TXPWR\_LEVEL.

### 19.9.5.12 PMD\_RATE.request

This primitive is the same as that defined in 17.5.5.6 and 18.4.5.10, except that the parameter RATE is expanded in scope to reflect the supported ERP transmission rates as defined in 19.9.4.3.

### 19.9.5.14 PMD\_RSSI.indicate

This primitive is the same as that defined in 17.5.5.7 and 18.4.5.11, including the parameter RSSI. This primitive is used to aid in link optimization algorithms such as roaming decisions.

### 19.9.5.15 PMD\_SQ.indicate

This primitive is the same as that defined in 18.4.5.12, including the parameter SQ. This primitive is not used in association with reception of ERP-OFDM modulations. This primitive is used to aid in link optimization algorithms such as roaming decisions.

### 19.9.5.16 PMD\_CS.indicate

This primitive is the same as that defined in 18.4.5.13, except that its use is expanded for use with all ERP modulation types as described in 19.3.5.

1   **19.9.5.17 PMD\_ED.indicate**

2  
3  
4  
5  
6

This primitive is the same as that defined in 18.4.5.14, except that its use is expanded for use with all ERP modulation types as described in 19.3.5.

# Annex A Protocol implementation conformance statement (PICS) Proforma (normative)

## A.3 Instructions for completing the PICS proforma

### A.3.1

*Change the 5<sup>th</sup> paragraph as shown:*

The PICS proforma for a station consists of A.4.1 through A.4.4 inclusive, and at least one of A.4.5, A.4.6, ~~or~~ A.4.7, A.4.8, A.4.9 or A.4.12 corresponding to the PHY implemented.

## A.4 PIC Proforma

### A.4.3 - IUT Configuration

*Insert an entry CF10 to the table as shown*

Item	IUT Configuration	References	Status	Support
* CF10	<u>Extended Rate PHY layer</u>	<u>19</u>	<u>O.2</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>

### A.4.4 MAC protocol

*Insert the following into A.4.4.1, numbering as appropriate*

#### A.4.4.1 Mac Protocol capabilities

Item	Protocol Items	Reference	Status	Support
<u>PC16</u>	<u>Set dot11ShortPreambleOptionImplemented to 1</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC17</u>	<u>Set PBCC subfield as described in reference</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC18</u>	<u>Set DSSS-OFDM subfield as described in reference</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC19</u>	<u>Set channel agility subfield as described in reference</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC20</u>	<u>Set Short Slot Time subfield as described in reference</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC21</u>	<u>Monitor each received short time slot subfield and take action as described in reference.</u>	<u>7.3.1.4</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC22</u>	<u>Transmit the ERP Information element in each transmitted Beacon or Probe Responses in the format and with content as described in reference</u>	<u>7.3.2.13</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC23</u>	<u>Receive the ERP Information element and employ a protection mechanism when required prior to transmitting information using ERP-OFDM modulation.</u>	<u>7.3.2.13</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC24</u>	<u>Determine the value of aCWmin based on the characteristic rate set as described in the reference</u>	<u>9.2.12</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u>

				NA O
<u>PC25</u>	<u>Transmit control response frames at the largest basic rates less than equal to the rate received and with the same PHY options or use the highest mandatory rate if no basic rate meets the above criterion.</u>	<u>9.6</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC27</u>	<u>Transmit broadcast or multicast frames at a rate in the basic rate set.</u>	<u>9.6</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC28</u>	<u>Transmit unicast frames at any supported rate selected by a rate switching mechanism as long as it is supported by the destination STA.</u>	<u>9.6</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC29</u>	<u>Don't transmit at a data rate higher than the greatest rate in the OperationalRateSet</u>	<u>9.6</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC30</u>	<u>Use ERP Information element to control use of protection mechanism as described in the reference</u>	<u>9.10</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC31</u>	<u>Updated NAV is long enough to cover frame and any response</u>	<u>9.10</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC32</u>	<u>Support transmission of CTS to self sequence as described in the references</u>	<u>7.2.12,</u> <u>9.2.11,</u> <u>9.7</u>	<u>CF10:</u> <u>O</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC33</u>	<u>Support reception of CTS to self sequence as described in the references</u>	<u>7.2.12,</u> <u>9.2.11,</u> <u>9.7</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>
<u>PC34</u>	<u>Update NAV</u>	<u>9.10</u>	<u>CF10:</u> <u>M</u>	<u>Yes O</u> <u>No O</u> <u>NA O</u>

*Insert a new section A.4.12 for the ERP parameters.*

## A 4.12 – ERP Physical Layer functions

Item	PHY Features	References	Status	Support
*ERP1	Transmit and Receive ERP-DSSS data rates 1 and 2 Mbit/s and ERP-CCK data rates 5.5 and 11 Mbit/s	19.3.2	CF10:M	Yes O No O NA O
ERP1.1	Transmit and receive ERP-OFDM data rates of 6, 12, and 24 Mbit/s	19.3.2	CF10:M	Yes O No O NA O
ERP1.2	Transmit and receive ERP-OFDM data rate of 9	19.3.2	ERP1:O	Yes O No O NA O
ERP1.3	Transmit and receive ERP-OFDM data rate of 18	19.3.2	ERP1:O	Yes O No O NA O
ERP1.4	Transmit and receive ERP-OFDM data rate of 36	19.3.2	ERP1:O	Yes O No O NA O
ERP1.5	Transmit and receive ERP-OFDM data rate of 48	19.3.2	ERP1:O	Yes O No O NA O

ERP1.6	Transmit and receive ERP-OFDM data rate of 54	19.3.2	ERP1:O	Yes O No O NA O
* ERP2	Transmit and receive ERP-PBCC data rate of 22 Mbit/s	19.3.2	CF10&HRDS9.1&HRDS9.2:O	Yes O No O NA O
ERP2.1	Transmit and receive ERP-PBCC data rate of 33 Mbit/s	19.3.2	ERP2:O	Yes O No O NA O
*ERP3	Transmit and receive DSSS-OFDM data at same rates as ERP-OFDM	19.3.2	CF10:O	Yes O No O NA O
ERP4	Support of ERP3 required PPDU formats as described in reference	19.3.2	CF10:O	Yes O No O NA O
ERP5	Able to transmit and receive long and short DSSS as well as OFDM preambles	19.3.2	CF10:M	Yes O No O NA O
ERP6	Set SERVICE field bits for DSSS-OFDM, ERP-PBCC, locked clocks, and length extension (b0, b2, b3, b5, b6, and b7)	19.3.2.1	CF10:M	Yes O No O NA O
ERP7	Set b1 & b4 of long and short preamble PPDU SERVICE field to zero.	19.3.2.1	CF10:M	Yes O No O NA O
ERP8	b2 shall be set to 1 in all long and short preamble PPDU SERVICE fields.	19.3.2.1	CF10:M	Yes O No O NA O
ERP9	Set bits b5, b6, and b7 of the long and short preamble PPDU SERVICE fields as described in the reference.	19.3.2.1, 19.3.2.1.2	CF10:M	Yes O No O NA O
ERP10	Use clause 15 or 18 rates when using protection mechanisms	9.10	CF10:M	Yes O No O NA O
ERP12	SIGNAL field set to 3 Mbit/s in all long and short DSSS-OFDM PPDU formats as described in the reference.	19.3.2.4	ERP3:M	Yes O No O NA O
ERP13	Calculate DSSS-OFDM length with signal extension	19.3.2.4.1	ERP3:M	Yes O No O NA O
ERP14	Set ERP-PBCC encoder in state 0 at beginning of PPDU	19.3.3.2	ERP2:M	Yes O No O NA O
ERP15	Set phase of ERP-PBCC relative to header	19.3.3.2	ERP2:M	Yes O No O NA O
ERP16	Use same pulse shape for 22 and 33 Mbit/s	19.3.3.2	ERP2:M	Yes O No O NA O
ERP17	Add signal extension of 6 $\mu$ s	19.3.2.3.1	CF10:M	Yes O No O NA O

ERP18	Simultaneous CCA on long preamble Barker, short preamble Barker, and OFDM	19.3.5	CF10:M	Yes O No O NA O
ERP19	CCA with energy detect above threshold and carrier sense	19.3.5	CF10:M	Yes O No O NA O
ERP20	Decode as DSSS-OFDM if signal field indicates 3 Mbit/s	19.3.6	ERP3:M	Yes O No O NA O
ERP21	Able to automatically detect format of long preamble Barker, short preamble Barker, and OFDM and receive appropriately.	19.3.6	CF10:M	Yes O No O NA O
ERP22	Comply with local regulatory frequency allocation requirements	19.4.1	CF10:M	Yes O No O NA O
ERP23	Use frequency plan for 2.4 GHz	19.4.2	CF10:M	Yes O No O NA O
ERP24	Comply with regulatory spurious emissions regulations	19.4.3	CF10:M	Yes O No O NA O
ERP25	Slot time requirements	19.4.4	CF10:M	Yes O No O NA O
ERP26	Implement Short Slot Time option	19.4.4	CF10:O	Yes O No O NA O
ERP27	Use 10 $\mu$ s SIFS time	19.4.6	CF10:M	Yes O No O NA O
ERP28	Comply with regulatory transmit power requirements	19.4.7.1	CF10:M	Yes O No O NA O
ERP29	$\pm 25$ PPM frequency tolerance	19.4.7.2	CF10:M	Yes O No O NA O
ERP30	Use locked clocks	19.4.7.2, 19.4.7.3	CF10:M	Yes O No O NA O
ERP32	Tolerate input level of –20 dBm	19.5.3	CF10:M	Yes O No O NA O
ERP33	Use specified transmit mask	19.5.4	CF10:M	Yes O No O NA O
ERP34	Meet sensitivity for all supported data rates	19.5.1	CF10:M	Yes O No O NA O
ERP35	Reject adjacent channels as in Table 91 in 17.3.10.1 or in 18.4.8.3 as appropriate	19.5.2	CF10:M	Yes O No O NA O
ERP36	Coherent transition of ERP-DSSS to OFDM	19.7.2, 19.7.2.7	ERP3:M	Yes O No O NA O
ERP37	Same signal shaping of ERP-DSSS and OFDM	19.7.2.1	ERP3:M	Yes O No O NA O
ERP38	Transmit power equal for ERP-DSSS and OFDM segments	19.7.2.2	ERP3:M	Yes O No O NA O
ERP39	Align transition time	19.7.2.3	ERP3:M	Yes O No O NA O
ERP40	Set transition phase to 45 degrees	19.7.2.3	ERP3:M	Yes O No O NA O

ERP41	Calculate ERP-OFDM TXTime	19.8.3.1	CF10:M	Yes O No O NA O
ERP42	Calculate ERP-PBCC TXTime	19.8.3.2	ERP2:M	Yes O No O NA O
ERP43	Calculate DSSS-OFDM TXTIME	19.8.3.3	ERP3:M	Yes O No O NA O
ERP44	Revert to 20μs slot time when establishing association with a long slot time STA.	7.3.1.4	CF10:M	Yes O No O NA O
ERP45	Support TXVECTOR and RXVECTOR as described in reference.	9.2	CF10:M	Yes O No O NA O
ERP46	Terminate single carrier segment smoothly	19.7.2.4	ERP3:M	Yes O No O NA O

## Annex C Formal Description of MAC operation (normative)

*Insert a line to the ElementID sort routine as shown and change the revision suffix:*

```

/*****

```

```

* ElementID sort

```

```

*****/

```

```

newtype ElementID inherits Octetstring operators all;

```

```

adding literals eSsId, eSupRates, eFhParms, eDsParms,

```

```

eCfParms, eTim, eIbParms, eCtext, eERP, eExtSupRates;

```

```

axioms

```

```

    eSsId == mkOS(0, 1); /* service set identifier (0:32) */

```

```

    eSupRates == mkOS(1, 1); /* supported rates (1:8) */

```

```

    eFhParms == mkOS(2, 1); /* FH parameter set (5) */

```

```

    eDsParms == mkOS(3, 1); /* DS parameter set (1) */

```

```

    eCfParms == mkOS(4, 1); /* CF parameter set (6) */

```

```

    eTim == mkOS(5, 1); /* Traffic Information Map (4:254) */

```

```

    eIbParms == mkOS(6, 1); /* IBSS parameter set (2) */

```

```

    eCountry == mkOS(7, 1); /* Country Information (8:254) */

```

```

    eHopParm == mkOS(8, 1); /* FH Hopping Parameters (4) */

```

```

    eHopTable == mkOS(9, 1); /* FH Hopping Table (6:254) */

```

```

    eRequest == mkOS(10, 1); /* Request (3:254) */

```

```

    eCtext == mkOS(16, 1); /* challenge text (128, see 8.1.2.2) */

```

```

    eERP == mkOS(42, 1); /* ERP Information element */

```

```

    eExtSupRates == mkOS(50, 1); /* Extended Supported Rates (1:255) */

```

```

endnewtype ElementID;

```

*Insert new elements in the Capability field assignments sort routine and change the revision suffix:*

```

/*****

```

```

* Capability field bit assignments sort

```

```

*****/

```

```

newtype Capability inherits Bitstring operators all;

```

```

adding literals cEss, cIbss, cPollable, cPollReq, cPrivacy, cShortPreamble, cPBCC, cChannelAgility, cShortSlot,

```

```

cDsssOfdm

```

```

axioms

```

```

    cEss == S8(1,0,0,0,0,0,0,0) // 0x00; /* ESS capability */

```

```

    cIbss == S8(0,1,0,0,0,0,0,0) // 0x00; /* IBSS capability */

```

```

    cPollable == S8(0,0,1,0,0,0,0,0) // 0x00; /* CF-pollable (sta), PC present (ap) */

```

```

    cPollReq == S8(0,0,0,1,0,0,0,0) // 0x00; /* not CF poll req (sta), PC polls (ap) */

```


```

1      cPrivacy == S8(0,0,0,0,1,0,0,0) // 0x00; /* WEP required */
2      cShortPreamble == S8(0,0,0,0,0,1,0,0) // 0x00; /* Short Preamble */
3      cPBCC == S8(0,0,0,0,0,0,1,0) // 0x00; /* PBCC */
4      cChannelAgility == S8(0,0,0,0,0,0,0,1) // 0x00; /* Channel Agility */
5      cShortSlot == 0x00 // S8(0,1,0,0,0,0,0,0); /* Short Slot Time */
6      cDsssOfdm == 0x00 // S8(0,0,0,0,1,0,0,0); /* DSSS-OFDM modulation */
7
8  endnewtype Capability;
9
10 Insert new elements in the StatusCode sort routine and change the revision suffix:
11
12
13 /*****
14  * StatusCode sort
15  *****/
16 newtype StatusCode inherits Octetstring operators all;
17 adding literals successful, unspec_fail, unsup_cap,
18 reasoc_no_asoc, fail_other, unsupt_alg, auth_seq_fail,
19 chlng_fail, auth_timeout, ap_full, unsup_rate, no_short_preamble,
20 no_Pbcc, no_agility, no_short_slot, no_dsss_ofdm;
21 axioms
22     successful == mkOS(0, 2);
23     unspec_failure == mkOS(1, 2);
24     unsup_cap == mkOS(10, 2);
25     reasoc_no_asoc == mkOS(11, 2);
26     fail_other == mkOS(12, 2);
27     unsupt_alg == mkOS(13, 2);
28     auth_seq_fail == mkOS(14, 2);
29     chlng_fail == mkOS(15, 2);
30     auth_timeout == mkOS(16, 2);
31     ap_full == mkOS(17, 2);
32     unsup_rate == mkOS(18, 2);
33     no_short_preamble == mkOS(19, 2);
34     no_Pbcc == mkOS(20, 2);
35     no_agility == mkOS(21, 2);
36     no_short_slot==mkOS(24,2);
37     no_dsss_ofdm==mkOS(25,2);
38 endnewtype StatusCode;
39

```

1 *Change the diagram ap\_tx\_idle\_2 as follows:*

2  
3 *(Change revision suffix from e to f and delete symbols after Backoff(0,0) replacing with off-page connector to*  
4 *chk\_rts\_cts.)*  
5

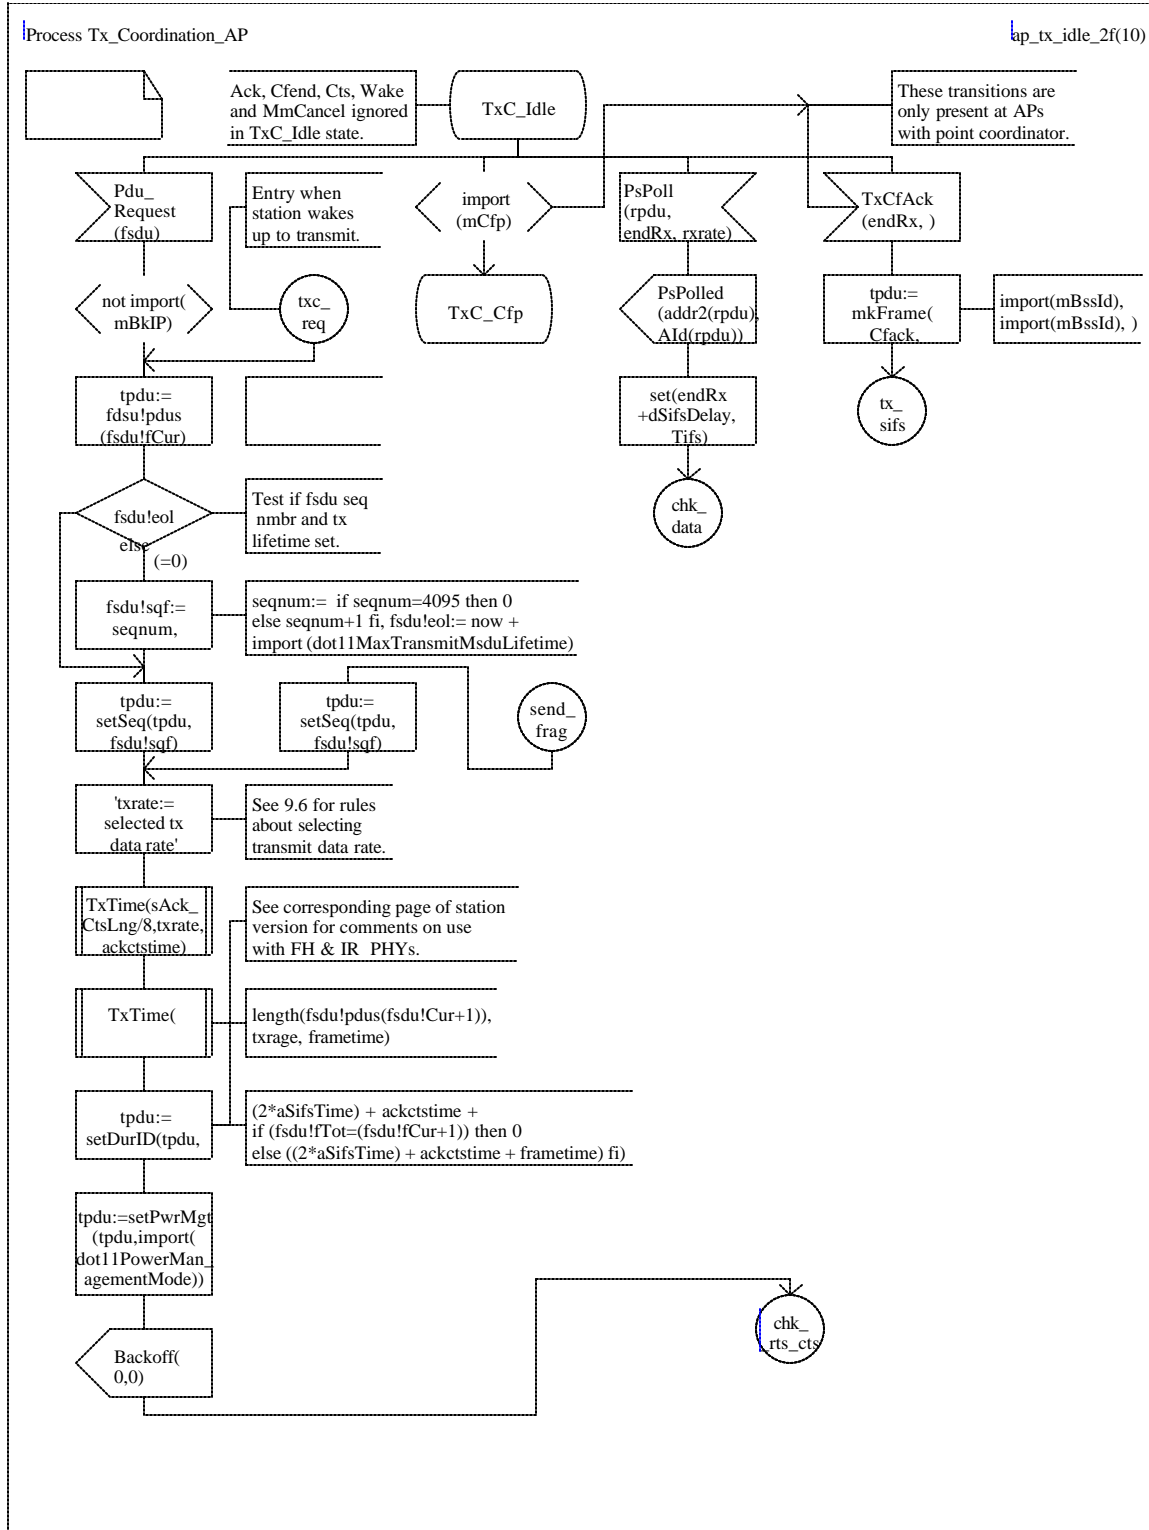


- 1
- 2
- 3




1 Change the diagram *sta\_tx\_idle\_2* as follow:

2  
3 (Change revision suffix from *e* to *f* and delete symbols after *Backoff(0,0)* replacing with off-page connector to

4 *chk\_rts\_cts*.)

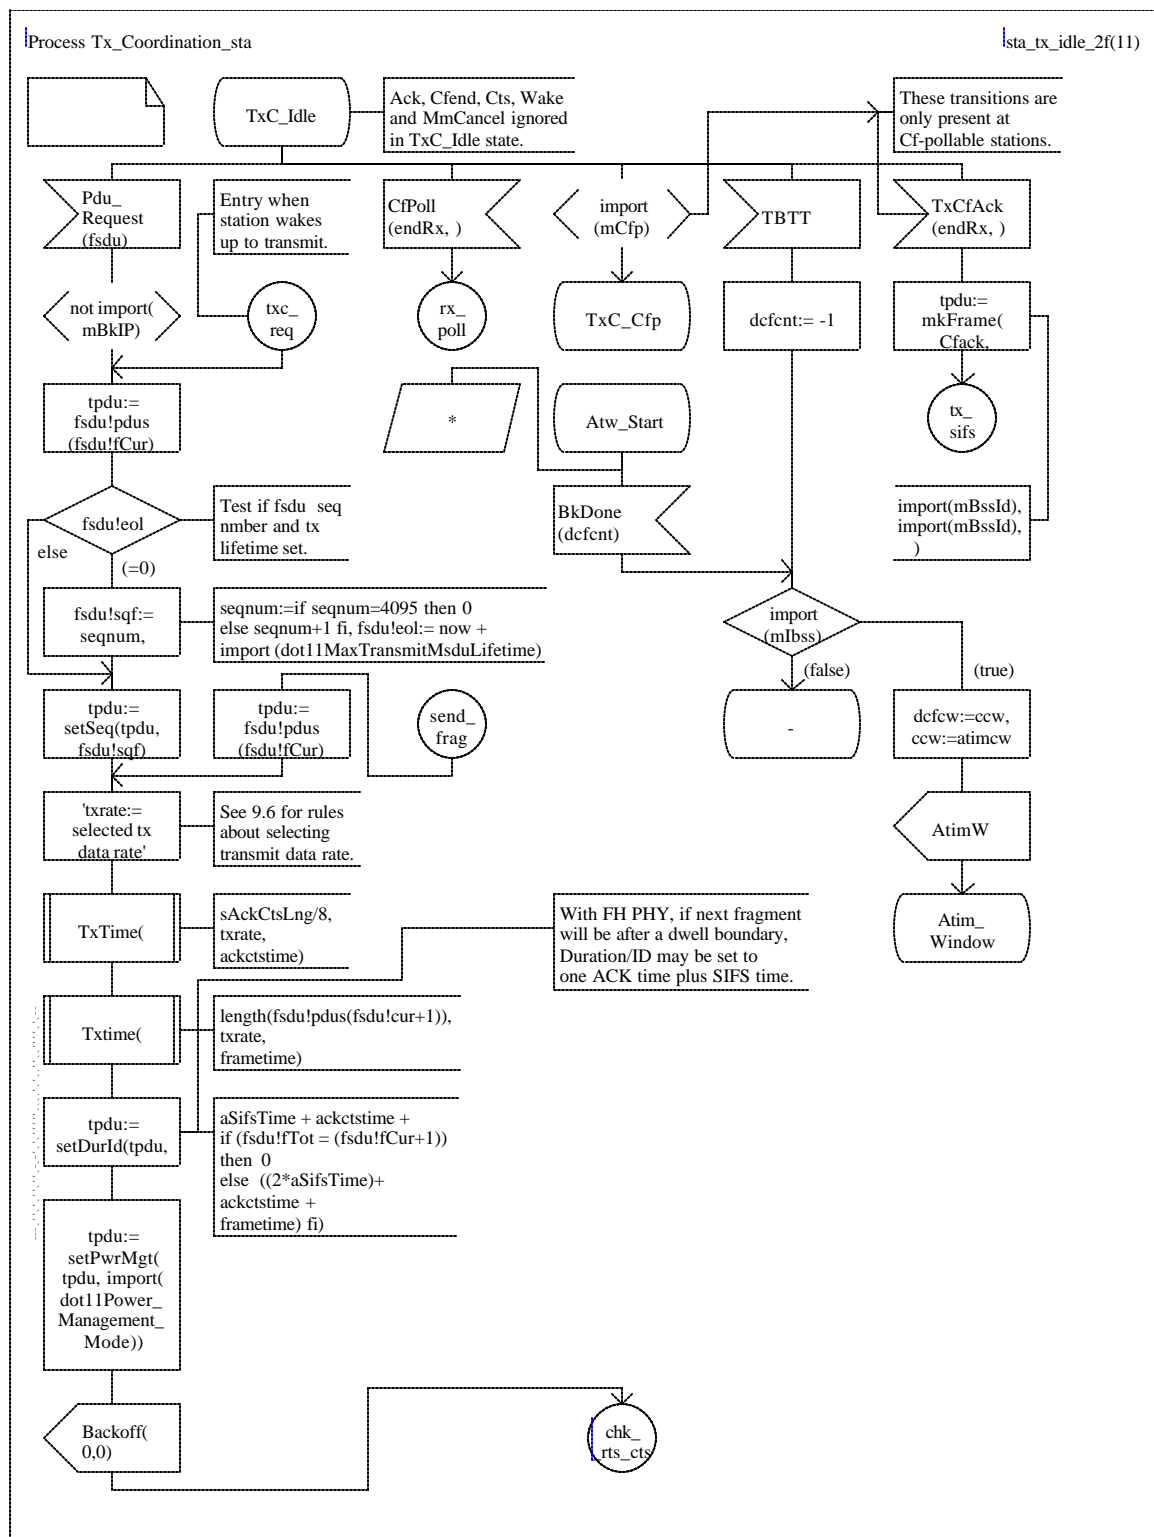

3  
4

## Annex D ASN.1 coding of MAC and PHY MIB (normative)

### *Change the following attribute definitions*

dot11PHYType OBJECT-TYPE

SYNTAX INTEGER { fhss(1), dsss(2), irbaseband(3), ofdm(4), hrdsss(5), erp(6) }

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This is an 8-bit integer value that identifies the PHY type supported by the attached PLCP and PMD. Currently defined values and their corresponding PHY types are:  
FHSS 2.4 GHz = 01 , DSSS 2.4 GHz = 02, IR Baseband = 03,  
OFDM 5GHz = 04, HRDSSS = 05, ERP = 06 "  
::= { dot11PhyOperationEntry 1 }

dot11RTSThreshold OBJECT-TYPE

SYNTAX INTEGER (0..2347)

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This attribute shall indicate the number of octets in an MPDU, below which an RTS/CTS handshake shall not be performed, except as RTS/CTS is used as a cross modulation protection mechanism as defined in 9.10. An RTS/CTS handshake shall be performed at the beginning of any frame exchange sequence where the MPDU is of type Data or Management, the MPDU has an individual address in the Address1 field, and the length of the MPDU is greater than this threshold. (For additional details, refer to Table 21 in 9.7.) Setting this attribute to be larger than the maximum MSDU size shall have the effect of turning off the RTS/CTS handshake for frames of Data or Management type transmitted by this STA. Setting this attribute to zero shall have the effect of turning on the RTS/CTS handshake for all frames of Data or Management type transmitted by this STA. The default value of this attribute shall be 2347."

::= { dot11OperationEntry 2 }

dot11SupportedDataRatesTxIndex OBJECT-TYPE

SYNTAX Integer32 (1..~~8255~~)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Index object that identifies which data rate to access.  
Range is 1..~~8255~~."

::= { dot11SupportedDataRatesTxEntry 1 }

dot11SupportedDataRatesRxIndex OBJECT-TYPE

SYNTAX Integer32 (1..~~8255~~)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Index object that identifies which data rate to access.  
Range is 1..~~8255~~."

::= { dot11SupportedDataRatesRxEntry 1 }

*In "Major sections" of Annex D, insert the following text to the end of "PHY Attributes" section:*

```

1  -- dot11PhyERPTable ::= { dot11phy 14 }

2  Insert the following into the 802.11 MIB in Annex D, between the section entitled: "End of dot11 Hopping
3  Pattern TABLE" and the section entitled: "conformance information":

4  -- *****

5  -- * dot11PhyERPEntry TABLE

6  -- *****

7  dot11PhyERPTable OBJECT-TYPE
8      SYNTAX SEQUENCE OF Dot11PhyERPEntry
9      MAX-ACCESS not-accessible
10     STATUS current
11     DESCRIPTION
12         "Entry of attributes for dot11PhyERPEntry. Implemented as a
13         table indexed on ifIndex to allow for multiple instances on
14         an Agent."
15     ::= { dot11phy 14 }

16
17 dot11PhyERPEntry OBJECT-TYPE
18     SYNTAX Dot11PhyERPEntry
19     MAX-ACCESS not-accessible
20     STATUS current
21     DESCRIPTION
22         "An entry in the dot11PhyERPEntry Table.
23         ifIndex - Each 802.11 interface is represented by an
24         ifEntry. Interface tables in this MIB module are indexed
25         by ifIndex."
26     INDEX { ifIndex }
27     ::= { dot11PhyERPTable 1 }

28
29 Dot11PhyERPEntry ::= SEQUENCE {
30     dot11ERPBBCCOptionImplemented TruthValue,
31     dot11ERPBBCCOptionEnabled TruthValue,
32     dot11DSSSOFDMAOptionImplemented TruthValue,
33     dot11DSSSOFDMAOptionEnabled TruthValue,
34     dot11ShortSlotTimeOptionImplemented TruthValue,
35     dot11ShortSlotTimeOptionEnabled TruthValue }

36
37
38 dot11ERPBBCCOptionImplemented OBJECT-TYPE
39     SYNTAX TruthValue
40     MAX-ACCESS read-only
41     STATUS current
42     DESCRIPTION
43         "This attribute, when true, shall indicate that the ERP-PBCC modulation option as defined in 19.6 is
44         implemented. The default value of this attribute is false."
45     ::= { dot11PhyERPEntry 1 }

46
47 dot11ERPBBCCOptionEnabled OBJECT-TYPE
48     SYNTAX TruthValue
49     MAX-ACCESS read-write

```

```

1      STATUS current
2      DESCRIPTION
3          "This attribute, when true, shall indicate that the ERP-PBCCoption as defined in 19.6 is enabled. The default
4          value of this attribute is false."
5      ::= { dot11PhyERPEntry 2 }
6
7
8      dot11DSSSOFDMAOptionImplemented OBJECT-TYPE
9          SYNTAX TruthValue
10         MAX-ACCESS read-only
11         STATUS current
12         DESCRIPTION
13             "This attribute, when true, shall indicate that the DSSS-OFDM option as defined in 19.7 is implemented. The
14             default value of this attribute is false."
15         ::= { dot11PhyERPEntry 3 }
16
17         dot11DSSSOFDMAOptionEnabled OBJECT-TYPE
18             SYNTAX TruthValue
19             MAX-ACCESS read-write
20             STATUS current
21             DESCRIPTION
22                 "This attribute, when true, shall indicate that the DSSS-OFDM option as defined in 19.7 is enabled. The
23                 default value of this attribute is false."
24             ::= { dot11PhyERPEntry 4 }
25
26
27         dot11ShortSlotTimeOptionImplemented OBJECT-TYPE
28             SYNTAX TruthValue
29             MAX-ACCESS read-write
30             STATUS current
31             DESCRIPTION
32                 "This attribute, when true, shall indicate that the Short Slot Time option as defined in 7.3.1.4 is
33                 implemented. The default value of this attribute is false."
34             ::= { dot11PhyERPEntry 5 }
35
36         dot11ShortSlotTimeOptionEnabled OBJECT-TYPE
37             SYNTAX TruthValue
38             MAX-ACCESS read-write
39             STATUS current
40             DESCRIPTION
41                 "This attribute, when true, shall indicate that the Short Slot Time option as defined in 7.3.1.4 is enabled.
42                 The default value of this attribute is false."
43             ::= { dot11PhyERPEntry 6 }
44
45
46
47     -- *****
48     -- * End of dot11PhyERPEntry TABLE
49     -- *****
50

```

*Insert a new compliance group to the compliance statements just before the section: "OPTIONAL-GROUPS":*

GROUP dot11PhyERPComplianceGroup

DESCRIPTION

"Implementation of this group is required when object dot11PHYType has the value of ERP. This group is mutually exclusive with the groups dot11PhyIRComplianceGroup and dot11PhyFHSSComplianceGroup."

*Insert the following text into the 802.11 MIB in Annex D, after the definition of the dot11PhyFHSSComplianceGroup2 Object Group:*

dot11PhyERPComplianceGroup OBJECT-GROUP

OBJECTS { dot11CurrentChannel,  
dot11ShortPreambleOptionImplemented,  
dot11ChannelAgilityPresent,  
dot11ChannelAgilityEnabled,  
dot11DSSSOFDMOptionImplemented,  
dot11DSSSOFDMOptionEnabled,  
dot11PBCCOptionImplemented,  
dot11ERPBPCCOptionImplemented,  
dot11ShortSlotTimeOptionImplemented,  
dot11ShortSlotTimeOptionEnabled }

STATUS current

DESCRIPTION

"Attributes that configure the ERP."

::= { dot11Groups 24 }